

# HALFEN DEMU FIXING ANCHORS

## Technical Product Information



ETA with fire resistance  
classification for  
T-FIXX<sup>®</sup> anchors ETA-13/0222  
and HALFEN DEMU Bolt  
anchors ETA-13/0401



Fire resistance





# **We are one team.** **We are Leviat.**

Leviat is the new name of CRH's construction accessories companies worldwide.

Under the Leviat brand, we are uniting the expertise, skills and resources of HALFEN and its sister companies to create a world leader in fixing, connecting and anchoring technology.

The products you know and trust, including the HALFEN DEMU Fixing Anchors, will remain an integral part of Leviat's comprehensive brand and product portfolio. As Leviat, we can offer you an extended range of specialist products and services, greater technical expertise, a larger and more agile supply chain and better, faster innovation.

By bringing together CRH's construction accessories family as one global organisation, we are better equipped to meet the needs of our customers, and the demands of construction projects, of any scale, anywhere in the world.

**This is an exciting change. Join us on our journey.**

**Read more about Leviat at [Leviat.com](https://www.leviat.com)**



Our product brands include:

**Ancon**<sup>®</sup>

  
**HALFEN**

**PLAKA**



**60**

locations

sales in  
**30+**  
countries

**3000**

people worldwide

Imagine. Model. Make.

[Leviat.com](http://Leviat.com)

## HALFEN DEMU FIXING ANCHOR T-FIXX®/BOLT ANCHOR 1988, 1985

### Features

HALFEN DEMU Fixing anchors are intended for permanent anchorage in concrete. Different dimensions and variants for corrosion protection offer a wide product range.

#### Strong features

- Combination of standard anchor sleeve and bolt anchor with metrical ISO thread
- Diameter from M10 to M20
- For permanent anchoring under predominantly static or quasi static actions
- Use in reinforced and unreinforced normal weight concrete from strength class C20/25 to C50/60, cracked or non cracked
- For transmission of tensile loads, shear loads and a combination of both



#### Product Safety

- Since July 2013 with European Technical Approval (ETA)
- Optimised calculation based on current state of the art technology
- Free design software for download
- Dataclip for identification

#### Material and corrosion protection

- Corrosion protection in GV (zinc galvanised) and in stainless steel A4 (A4-50, A4-80)

### WE ARE YOUR BIM PARTNER: Building Information Modeling

All our products for the precast industry are available as BIM enabled (Building Information Modeling) CAD files. These are suitable for use in a 3D model of your project. BIM software for planning, realising and building maintenance signi-

ficantly simplifies collaboration between architects, clients and contractors. All relevant information for the construction project is available in a single platform. Connections between building elements can be quickly checked


and any problems solved. All parties involved in the process are able to react appropriately, saving time and costs.



# HALFEN DEMU FIXING ANCHORS

---

## Contents

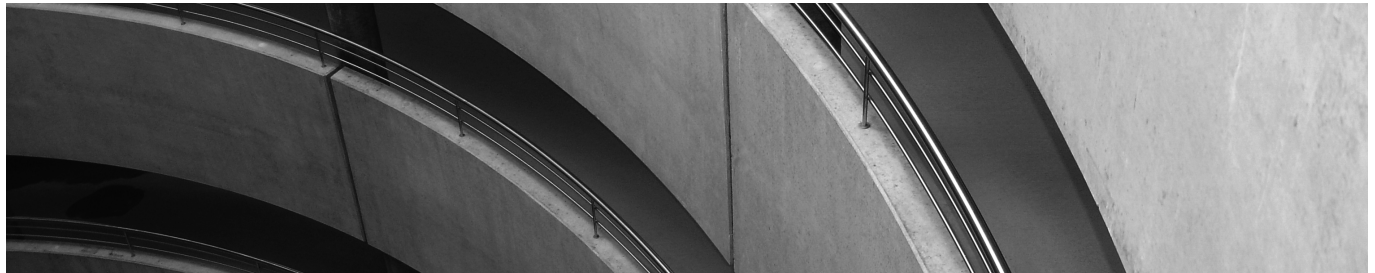

<b>Systematic fixing solutions</b>	<b>4</b>
- Application examples	4
- Advantages	5
- Typical situations / Load diagrams	6
- Design concept	7-8
<b>General technical information</b>	<b>8</b>
- Material / Corrosion protection	8-9
- Changes in the product range	10-11
<b>T-FIXX® anchors</b>	<b>12</b>
- General information / T-FIXX®	12-13
<b>Bolt anchors</b>	<b>14</b>
- 1988	14-16
- 1985	17
- 1980-P	18-19
<b>Bar anchors</b>	<b>20</b>
- 4010 / 3016 / 3010 / 1980-S / 1988-S	21-26
- 4030 / 1554 / 1558	27-30
- Bending of bar anchors	31
<b>Socket anchors</b>	<b>32</b>
- HALFEN VEMO Socket anchors	32-33
<b>Accessories</b>	<b>34</b>
- Fixing pins, nailing plates, sealing caps, thread adapters	34-35
- Positioning plate	35-36
<b>Installation instructions</b>	<b>37</b>
- Fixing anchors, accessories	37-38
<b>Fixing components – assembly instruction</b>	<b>39</b>
- General information / Determining bolt length	39
<b>Software</b>	<b>40</b>
- Calculation basics / About the HALFEN Software / Tender text	40-42
- Calculation example	43
<b>Contact</b>	<b>45</b>

# SYSTEMATIC FIXING SOLUTIONS

## Application Examples

### FIXING OF BALCONY RAILINGS



### FIXING AND ADJUSTING PRECAST ELEMENTS



### FIXING OF SOLAR PANELS



### INSTALLATION OF FIXING ANCHORS



### FIXING OF PROPS ON PRECAST ELEMENTS



### APPLICATION IN PRECAST ELEMENTS FOR STADIUMS



### FIXING OF SEATS



### FIXING OF BRIDGE RAILINGS



# Systematic Fixing Solutions













## The advantages at a glance

**H**ALFEN DEMU Fixing anchors with internal thread are intended to be used for permanent anchorages under predominantly static actions or

quasi-static actions in reinforced and unreinforced normal weight concrete from strength class C20/25 to C90/105.

They may be used in cracked or non-cracked concrete for transmission of tensile loads, shear loads or a combination of both.



	T-FIXX®	Bolt anchor	Bar anchor	Socket anchor
Loads	Medium load capacity	High load capacity	High load capacity	Low load capacity
Application	<ul style="list-style-type: none"> <li>high/medium loads</li> <li>near edges applications (up to high strength concrete)</li> <li>thin elements</li> <li>load capacity of concrete decisive</li> <li>normal strength concrete</li> </ul>	<ul style="list-style-type: none"> <li>high loads</li> <li>use in full concrete (without influence of edges)</li> <li>high steel strength required</li> <li>up to high strength concrete</li> </ul>	<ul style="list-style-type: none"> <li>high tension loads (pullout)</li> <li>use in frontside of thin elements (deep embedment required)</li> <li>high steel strength required</li> <li>up to high strength concrete</li> </ul>	<ul style="list-style-type: none"> <li>low loads</li> <li>temporary fixings</li> <li>fixings without structural significance</li> </ul>
Examples for typical use	<ul style="list-style-type: none"> <li>fixing of railings for balconies, bridges</li> <li>fixing of utility equipment or power lines, installation brackets</li> <li>fixing of stadium seats</li> <li>fixing of steel stairs or ladders</li> <li>fixing of connection between precast elements</li> </ul>	<ul style="list-style-type: none"> <li>fixing of railings for balconies, bridges</li> <li>fixing of utility equipment, power lines, installation brackets</li> <li>fixing of stadium seats</li> <li>fixing of steel stairs or ladders</li> </ul>	<ul style="list-style-type: none"> <li>fixing of railings for balconies, bridges</li> <li>fixing of utility equipment, power lines, installation brackets</li> <li>fixing of stadium seats</li> <li>fixing of steel stairs or ladders</li> </ul>	<ul style="list-style-type: none"> <li>fixing of push pull props on precast elements</li> <li>fixing of windows</li> <li>fixing of machines on foundation (without dynamic loading)</li> <li>temporary bracing of precast elements</li> </ul>
Design concept / Calculation	 according to CEN/TS 1992-4-1/2	 according to CEN/TS 1992-4-1/2	 according to EN 1992-1-1 (chapter 8.4) / NEN 6720 art. 9.6 and 9.16	
Calculation Software				
ETA	 ETA-13/0222	 ETA-13/0401		

# SYSTEMATIC FIXING SOLUTIONS

## Typical Situations / Load Diagrams

### Load behaviour

The following is a short overview to help clarify the load behaviour and advantages of the different fixing anchor types as used in various main areas of application. The load behaviour – i.e. the load capacity as a function of different concrete classes – of certain types of T-FIXX® is compared with the corresponding types of HALFEN DEMU

Bolt anchors 1988, as illustrated in the diagrams.


A detailed calculation of the load behaviour (with all project specific influences such as; concrete strength, edge distances, etc.) can be done using the available software (→ see chapter "Software", pages 40–43).



### Fixing anchor embedded in full concrete (without edge influence)

**Situation 1:** The load capacity of concrete is decisive, bolt anchors with higher steel strength than the T-FIXX® do not increase the load bearing capacity  $N_{Rd}$  of the anchoring system. Only the concrete strength and the effective anchoring length determine the load capacity of the system.



**Example:** Short embedment length of fixing anchor (thin element)



Top view: Screw and fixture in anchor embedded in full concrete (without edge influence)


**Situation 2:** The load capacity of the steel is decisive; steel strength is determined by the load bearing capacity of the anchoring system. Steel load capacity of T-FIXX® has already been fully reached; therefore, compared to bolt anchors – increasing concrete strength does not allow higher values for  $N_{Rd}$ .

**Example:** Long embedment length of fixing anchor, high strength concrete

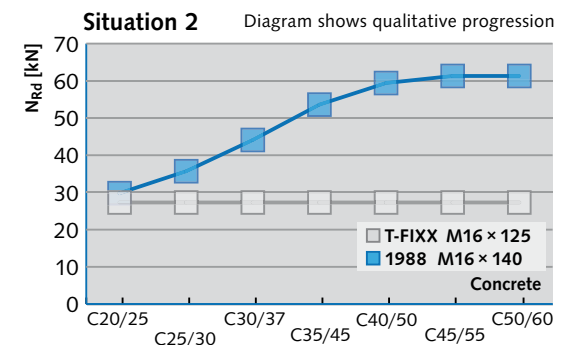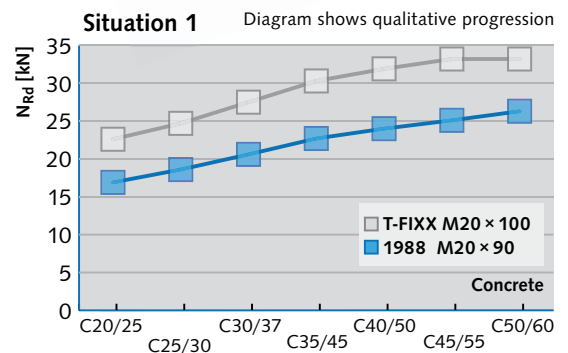


### Near edge anchor fixing

**Situation:** The load capacity of the concrete is decisive, bolt anchors with higher steel strength than the T-FIXX® do not increase the load bearing capacity  $N_{Rd}$  of the anchoring system. Only the concrete strength and the effective anchoring length determine the load capacity of the system.

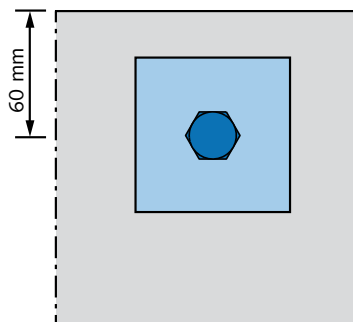

Top view: Screw and fixture in anchor embedded near the edge of the concrete element

**Example:** Fixing anchor near edges

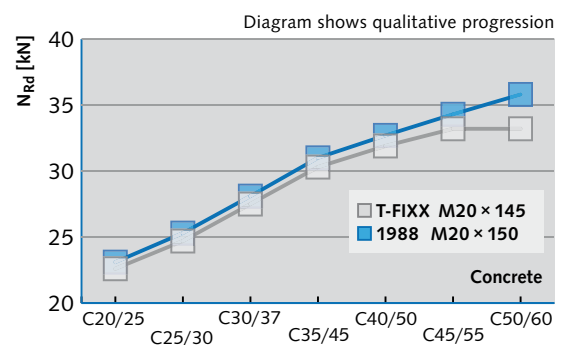



# SYSTEMATIC FIXING SOLUTIONS

## Design Concept

### Design concept

#### Planning standards apply for the whole of the European Union

- The European standard CEN/TS 1992-4 was issued in 2009 and covers the design method for "Design of fastenings for use in concrete".
- This approval standard represents current state of the art technology standards and may be used in all applications.
- To apply the European calculation method, product specific values such as load bearing capacities are necessary. These and further special regulations for dimensioning are included in the calculation software.
- This calculation method is supported by a comprehensive user-oriented and easy-to-use design software.

#### What is the CEN/TS 1992-4?

A European CEN standard was created with the aim of standardising the dimensioning of fastenings in concrete to a common basis. Cast-in fixings such as headed fasteners as well as post-installed anchors are regulated in this standard.

The standards committee CEN/TC 250/SC 2/WG 2 "Design of fastenings for use in concrete" was founded in 2000 with members from nine European nations.

In 2009, the set of regulations was published as CEN/TS 1992-4, TS "Technical Specification". This is a preliminary standard with the aim of conversion to a European standard. With its publication this standard represents state of the art technology and may be used in practice.

This preliminary CEN/TS 1992-4 standard has five parts:

- "General"
- "Headed bolts"
- "Anchor channels"
- "Dowel – Mechanical"
- "Dowel – Chemical"

With the switchover to one standard, this technical specification will become part of the European Concrete Standard EN1992. With the publication of the ETA for T-FIXX® and HALFEN DEMU Bolt anchors, the publication of all resources and documents as well as personal consultations, the future is already being prepared.

CEN/TS 1992-4 can be used if a technical specification is available for the fixings, which confirms the suitability of the product and contains the characteristic values necessary for dimensioning a fixing. For building products, an ETA (European Technical Assessment) represents this document.

The European Technical Assessment is a confirmation of the usability of a building product as defined by the Construction Products Regulation (CPR).

The ETA is based on tests, assessments and a technical evaluation by expert bodies appointed by the members of the EOTA. It comprises all product characteristics which are significant for compliance with statutory requirements in the member states, whereby the relevant requisite performance level may differ nationally or may depend on the intended purpose.

The resistances to steel failure are listed in the European Technical Assessment. The load bearing capacities are provided with dimensioning equations. Here all influences on the load bearing capacity of the fixing anchor are taken into consideration. The HALFEN DEMU Fixing anchors may be used in all concrete strength classes from C20/25 to C90/105. The planned strength is incorporated in the verifications.

The flexible dimensioning concept allows for the development in reinforced concrete construction towards using even lower component thicknesses with higher concrete strengths. For example, the resistance to concrete failure is 55% higher in a concrete of strength class C50/60 than in concrete of strength class C20/25. It is therefore possible to compensate lower edge distances with a higher concrete strength.



# SYSTEMATIC FIXING SOLUTIONS

## Design Concept

### Verification method according to CEN/TS 1992-4

#### Required verifications according to CEN/TS 1992-4

Tensile stress		Transverse stress	
Type of failure	Verification	Type of failure	Verification
steel failure of fastener	$N_{Ed} \leq N_{Rd,s}$	steel failure of fastener without lever arm	$V_{Ed} \leq V_{Rd,s}$
pull-out failure	$N_{Ed} \leq N_{Rd,p}$	steel failure of fastener with lever arm	$V_{Ed} \leq V_{Rd,s}$
concrete cone failure	$N_{Ed} \leq N_{Rd,c}$	concrete edge failure	$V_{Ed} \leq V_{Rd,c}$
splitting failure	$N_{Ed} \leq N_{Rd,sp}$	concrete pry-out failure	$V_{Ed} \leq V_{Rd,cp}$
blow-out failure <sup>①</sup>	$N_{Ed} \leq N_{Rd,cb}$	-	-

① Not required for fasteners with  $c > 0,5 h_{ef}$

#### Notes regarding the table

- $N_{Ed}$  and  $V_{Ed}$  are tension or shear stress respectively, acting on the fixing anchor.
- CEN/TS 1992-4 also regulates additional reinforcement; further verification must be provided here.

## GENERAL TECHNICAL INFORMATION

### Material

#### Material codings

Following abbreviations and icons help to illustrate the various materials and coatings used in this catalogue:

- WB** Untreated/mill finished
- GV** Zinc galvanised
- FV** Hot-dip galvanised
- A4-50** Stainless steel, strength class 50
- A4-80** Stainless steel, strength class 80

#### Welding

All HALFEN DEMU steel products in this catalogue are weldable. However, any welding, including tack welding, to these products can negatively influence their mechanical properties. Welding can affect the performance of the product.

If welding in the application is unavoidable, take the following into account:

- a possible change in performance; a possible reduction in load capacity
- remove any coating-layer before welding, and ensure welding fumes are safely extracted during welding
- use mandatory protective equipment
- the customer is responsible for making sure that applicable welding regulations are observed



Leviat is not liable for any damage caused to or by HALFEN DEMU products that have been subsequently welded.

## GENERAL TECHNICAL INFORMATION

### Material and Corrosion Protection

#### Corrosion protection

##### Galvanizing:

##### Zinc galvanizing (GV)

Zinc galvanizing (chromium VI free) with a passivation treatment is used.

The coating thickness is approximately 5–8 µm.

After galvanizing the products are dipped in a bichromate solution for passivation. The corrosion resistance is limited and depends on the immediate environment.

All threaded zinc galvanized products (T-FIXX® anchors, bolt anchors, bar anchors) have a yellow tint. Therefore the anchors are easily to distinguish from stainless steel types.

This does not apply to HALFEN VEMO Socket anchors.

##### Hot-dip galvanizing (FV)

Hot-dip galvanizing can only be used for the following connectors and threaded anchor types: 1988, 1980-P, 1980-S, 1988-S, 4010, 4030, 1554 and 1558.

The connectors are first galvanized by dipping in a galvanizing bath of approx. 460°C and then cutting the internal thread.

The thread is unprotected. The coating layer of the subsequently installed hot-dip galvanized bolt provides corrosion protection to the thread on the connector.

It is not possible to hot-dip galvanize HALFEN VEMO Socket anchors shown on pages 32 – 33 as the sleeves are crimped at one end. According to EN-ISO 1461 the coating thickness is at least 45 µm resp. 55 µm.

##### Stainless steel (A4)

Chromium is the most important alloying element in stainless steel. A specific chromium concentration ensures the generation of a passive layer on the surface of the steel that protects the base material against corrosion. This explains the high corrosion resistance of stainless steel.

#### Material and its application

Corrosion protection	Application
Zinc galvanizing (GV)	<b>Class 1: Insignificant corrosion exposure / Dry interior rooms</b> Fixing anchors may only be used in structures subject to dry internal conditions (e. g. residential, offices, schools, hospitals, commercial retail).
Hot-dip galvanizing (FV)	<b>Class 2: Low corrosion exposure</b> Fixing anchors may also be used in structures in unheated / uninsulated buildings where condensation may occur (e. g. warehouses, sport halls, parking garages), as well as in structures not exposed to rain in outside atmosphere with low level of pollution (mostly rural areas).
Stainless steel (A4)	<b>Class 3: Medium corrosion exposure</b> Fixing anchors may also be used in structures subject to external atmospheric exposure (including industrial and marine environment) or exposure in permanently damp internal conditions, if no particular aggressive conditions exist (e. g. permanent, alternating immersion in seawater) .

##### T-FIXX® made entirely of stainless steel

The T-FIXX A4 is made entirely of stainless steel; there is no requirement for minimal concrete cover as components cannot corrode.

Areas of application:

- bridge and tunnel construction (e. g. fastening of pipes)
- chemical industry (e. g. installations exposed to aggressive substances)
- reinforced concrete elements with increased demands on the concrete cover



No application for high corrosion level (corrosion resistance class IV according to DIN EN 1993-1-4), when high concentrations of chlorides, sulphur and nitrogen oxides are present: For example road tunnels, structures in salt water and indoor swimming pools.

## GENERAL TECHNICAL INFORMATION

---

### Changes in the Product Range

#### Changes since 1<sup>st</sup> January 2012

The HALFEN DEMU Anchor, the T-FIXX<sup>®</sup>, became available on 1<sup>st</sup> January 2012.

It`s not a socket anchor and it`s not a bolt anchor – it`s a clever combination of both, and can be used as a replacement for either product type.

#### **T-FIXX<sup>®</sup> can replace many other socket anchors**

- In terms of load capacity, T-FIXX<sup>®</sup> can replace all types of socket anchors of the same dimensions; because of the higher performance it is possible that T-FIXX<sup>®</sup> with smaller (thread) M-size can replace larger socket anchors! This will also allow a smaller bolt diameter so the cost for the fixing can be reduced. Our sales team can advise you on further cost effective planning.
- In addition, T-FIXX<sup>®</sup> can also replace bolt anchors in applications where the concrete strength is decisive, such as in small components, small centre-to-centre distances or small edge distances.

#### **Quality and reliability**

The quality of our products is very important. The T-FIXX<sup>®</sup> was tested extensively before production started. Using a dedicated calculation program engineers can design a safe and quality orientated solution using T-FIXX<sup>®</sup>. The software can be downloaded from the website.

In addition to the demand for cost-effective products, we recognise that safety and quality issues are becoming increasingly important in the market. Leviat leads the way in responding to these trends with a continued focus on product-innovation and quality.

#### **Replacement of some socket anchors**

Leviat provides over 160 different types of socket anchors in its range. Since 1936, when the socket anchors were first introduced to the market by HALFEN DEMU, the range was extended to specific customer requests. This resulted in different types of socket anchors with similar performance. Customers have indicated that greater uniformity (fewer types) would be beneficial. With the introduction of T-FIXX<sup>®</sup> as substitute anchors for our whole range, the time has arrived to revise our anchor range.

#### **End of production**

We have already ceased production of types 995 and 995-A, 1036 and 1036-A, 1074-A and the 1168-A.

#### **Alternatives for discontinued socket anchors**

Our Sales Departments can help you to find suitable alternative anchors for your applications.

The overview on the following page illustrates replacements for discontinued HALFEN DEMU Socket anchors.

#### **Reliable delivery times**

Effective delivery times are very important for Leviat. Supplying 160 different types from stock in a complex market is no longer time and cost-effective. By improving our socket anchors range and our delivery times we can help increase your productivity. T-FIXX GV and T-FIXX A4 orders can nearly always be taken from stock. We do this by using CNC production methods for T-FIXX<sup>®</sup>. CNC which can run 7 days a week, 24 hours a day. This allows us greater flexibility in production and more efficient delivery times.

#### **Software**

We provide an up-to-date calculation software, which includes values for T-FIXX<sup>®</sup>.

The software can be downloaded free from [www.halfen.com](http://www.halfen.com)

For technical support please contact us (see back cover for contact information).

## GENERAL TECHNICAL INFORMATION

### Changes in the Product Range

Range from 1<sup>st</sup> January 2012

#### Zinc galvanized (GV)










#### Stainless steel (A4)





### Alternatives to discontinued socket anchors

#### Discontinued socket anchors

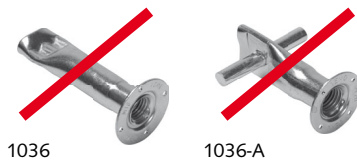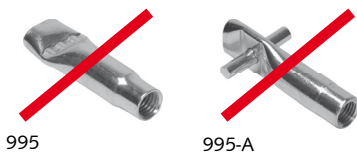

#### Alternatives (same thread diameter and length) ①

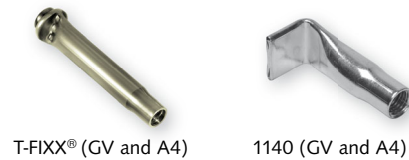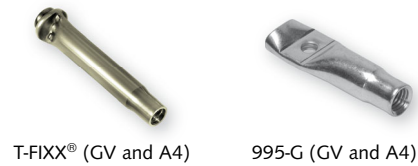

① Because of its high performance it is possible that T-FIXX® in smaller sizes can support similar loads to larger socket anchors! This will also allow a smaller bolt diameter and reduce costs for the fixing.

# T-FIXX® ANCHORS

## General / T-FIXX GV

### General Information


The HALFEN DEMU Fixing anchor T-FIXX® with European Technical Assessment is an innovative combination of socket anchor and bolt anchor.

T-FIXX® is calculable for each situation.

22 standard versions/sizes are available in zinc galvanized (GV) or stainless steel (A4). The zinc galvanized version of the T-FIXX® is yellow galvanized (chromium VI free) and therefore visually distinguishable from the stainless steel types.



### T-FIXX GV

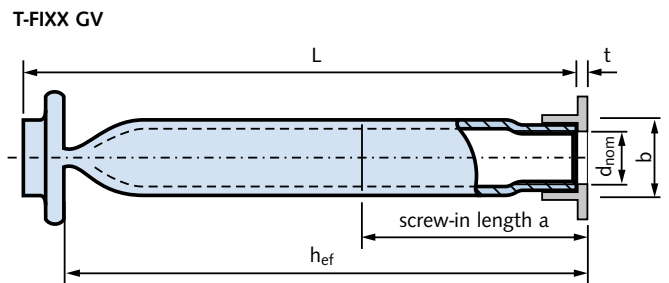

### Anchor description

The T-FIXX GV is manufactured from a steel precision tube (strength class E235).

The surface is zinc galvanized (GV), the internal thread is metric ISO.

For identification a grey plastic clip is attached ( $t=2\text{ mm}$ ).



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.

[www.halfen.com](http://www.halfen.com) → **downloads** → **software**.

For information about our software see page 40.

T-FIXX GV incl. identification clip (grey)


Order no.	Dimensions				Design loads for tension ①		Design loads for shear ①	
	$d_{nom} \times L$	$h_{ef}$	$a$	$b$	$N_{Rd,c}$ [kN]	$N_{Rd,c}$ [kN]	$V_{Rd,c}$ [kN]	$V_{Rd,c}$ [kN]
	[mm]	[mm]	[mm]	[mm]	C20/25	C45/55	C20/25	C45/55
0020.270-00001	M10 x 50	43.7	32	13.5	8.2	10.1	6.1	6.1
0020.270-00002	M10 x 75	68.7	32	13.5	10.1	10.1	6.1	6.1
0020.270-00003	M12 x 50	42.5	30	17	7.9	11.6	7.9	10.1
0020.270-00004	M12 x 70	62.5	38	17	14.0	16.8	10.1	10.1
0020.270-00005	M12 x 95	87.5	38	17	16.8	16.8	10.1	10.1
0020.270-00006	M16 x 60	51.3	32	21.3	10.4	15.4	10.4	15.4
0020.270-00007	M16 x 100	91.3	50	21.3	24.7	27.3	16.3	16.3
0020.270-00008	M16 x 125	116.8	50	21.3	27.3	27.3	16.3	16.3
0020.270-00009	M20 x 70	61.2	44	26.9	13.6	20.1	13.6	20.1
0020.270-00010	M20 x 100	91.2	62	26.9	24.7	35.3	21.2	21.2
0020.270-00011	M20 x 145	136.2	62	26.9	35.3	35.3	21.2	21.2

① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without load-reducing influences. Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling). Design loads are valid for permanent fixings and are not permitted for lifting!

# T-FIXX® ANCHORS

## T-FIXX A4

### Minimum allowed element thickness, minimum edge distances and spacing



**Top view:** Concrete member with 2 fixing anchors embedded.

Thread size	d	[mm]	M 10	M 12	M 16	M 20
Minimum spacing	$s_{min}$	[mm]	100	100	100	120
Minimum edge distance	$c_{min}$	[mm]	50	50	50	60
Minimum element thickness	$h_{min}$	[mm]	$h_{nom} + c_{nom}^*$			

$h_{nom}$ : embedment depth;  $c_{nom}$ : concrete cover


\*  $c_{nom}$  acc. to EN 1992-1 with  $c_{nom} \geq 20$  mm

For fixing anchors made of stainless steel a minimum concrete cover  $c_{nom} = 20$  mm is sufficient.

### T-FIXX A4



### T-FIXX A4

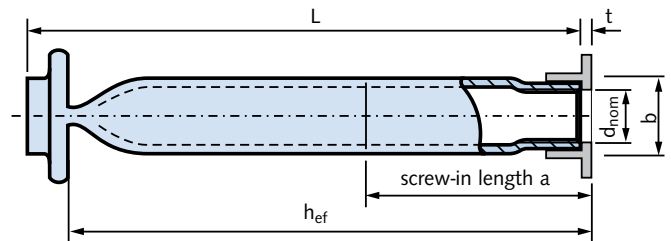

### Anchor description

The T-FIXX A4 is manufactured from a stainless steel tube (strength class A4-50).

The internal thread is metric ISO.

For identification a white plastic clip is attached ( $t=2$  mm).



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.

[www.halfen.com](http://www.halfen.com) → **downloads** → **software**.

For information about our software see page 40.

### T-FIXX A4 incl. identification clip (white)

Order no.	$d_{nom} \times L$ [mm]	Dimensions			Design loads for tension ①		Design loads for shear ①	
		$h_{ef}$ [mm]	a [mm]	b [mm]	$N_{Rd,c}$ [kN]	$N_{Rd,c}$ [kN]	$V_{Rd,c}$ [kN]	$V_{Rd,c}$ [kN]
					C20/25	C45/55	C20/25	C45/55
0020.270-00101	M10 × 50	43.7	32	13.5	8.2	8.9	5.4	5.4
0020.270-00102	M10 × 65	58.7	32	13.5	8.9	8.9	5.4	5.4
0020.270-00103	M12 × 50	42.5	30	17.2	7.9	11.6	7.9	9.4
0020.270-00104	M12 × 70	62.5	38	17.2	14.0	15.6	9.4	9.4
0020.270-00105	M12 × 115	107.5	38	17.2	15.6	15.6	9.4	9.4
0020.270-00106	M16 × 60	51.3	32	21.3	10.4	15.4	10.4	14.9
0020.270-00107	M16 × 80	71.3	50	21.3	17.1	25.0	14.9	14.9
0020.270-00108	M16 × 110	101.3	50	21.3	25.0	25.0	14.9	14.9
0020.270-00109	M20 × 70	61.2	44	26.9	13.6	20.1	13.6	19.4
0020.270-00110	M20 × 100	91.2	62	26.9	24.7	32.3	19.4	19.4
0020.270-00111	M20 × 125	116.2	62	26.9	32.3	32.3	19.4	19.4


① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without load-reducing influences. Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling). Design loads are valid for permanent fixings and are not permitted for lifting!

# BOLT ANCHORS

## Bolt Anchor 1988 GV



1988 GV

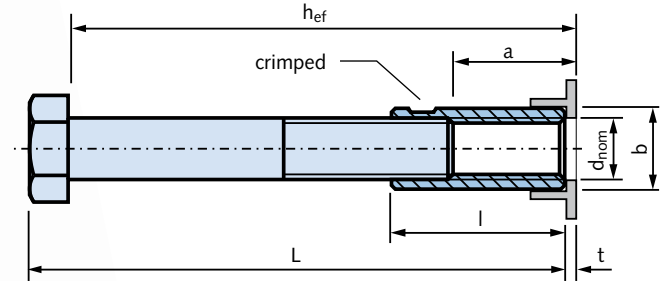

### Anchor description

The bolt anchor 1988 GV consists of a bolt (untreated, quality 8.8) with screwed and crimped sleeve. The sleeve with internal metric ISO thread is zinc galvanized (GV). The sleeve is manufactured from a steel precision tube. For identification a grey plastic clip is attached ( $t=2\text{ mm}$ ).



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.  
[www.halfen.com](http://www.halfen.com) → **downloads** → **software**.  
 For information about our software see page 40.

Bolt anchor 1988 GV incl. identification clip (grey)

Order no.	$d_{nom} \times L$ [mm]	Dimensions				Design loads for tension ①		Design loads for shear ①	
		$h_{ef}$ [mm]	$a$ [mm]	$b$ [mm]	$l$ [mm]	$N_{Rd,c}$ [kN] C20/25	$N_{Rd,c}$ [kN] C45/55	$V_{Rd,c}$ [kN] C20/25	$V_{Rd,c}$ [kN] C45/55
0020.010-00048	M12 x 55	49.0	25	15.5	35	9.7	14.4	9.7	14.4
0020.010-00001	M12 x 100	94.0	25	15.5	35	16.7	28.9	17.3	17.3
0020.010-00002	M12 x 150	144.0	25	15.5	35	16.7	28.9	17.3	17.3
0020.010-00049	M16 x 75	67.0	31	21	45	15.5	23.1	31.1	35.2
0020.010-00003	M16 x 140	132.0	31	21	45	29.8	58.8	35.2	35.2
0020.010-00004	M16 x 220	212.0	31	21	45	29.8	58.8	35.2	35.2
0020.010-00068	M20 x 90	79.0	37	26	55	19.9	29.5	39.8	52.9
0020.010-00005	M20 x 150	139.0	37	26	55	46.4	68.9	52.9	52.9
0020.010-00006	M20 x 180	169.0	37	26	55	46.5	88.2	52.9	52.9
0020.010-00007	M20 x 270	259.0	37	26	55	46.5	88.2	52.9	52.9
0020.010-00069	M24 x 110	97.0	48	32	70	27.1	40.2	54.1	80.3
0020.010-00008	M24 x 200	187.0	48	32	70	67.0	107.5	83.1	83.1
0020.010-00009	M24 x 320	307.0	48	32	70	67.0	138.7	83.1	83.1
0020.010-00070	M30 x 160	143.0	62	40	90	48.5	71.9	96.9	126.9
0020.010-00010	M30 x 240	223.0	62	40	90	94.4	140.0	126.9	126.9
0020.010-00011	M30 x 380	363.0	62	40	90	112.6	211.7	126.9	126.9
0020.010-00012	M36 x 300	279.0	76	47.5	110	132.0	195.9	185.8	185.8
0020.010-00013	M36 x 420	399.0	76	47.5	110	160.2	309.8	185.8	185.8
0020.010-00014	M42 x 300	276.0	70	54	110	129.9	192.7	222.8	222.8
0020.010-00015	M42 x 460	436.0	70	54	110	227.4	371.5	222.8	222.8

① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without load-reducing influences. Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling). Design loads are valid for permanent fixings and are not permitted for lifting!




## BOLT ANCHORS

### Bolt Anchor 1988 FV



1988 FV

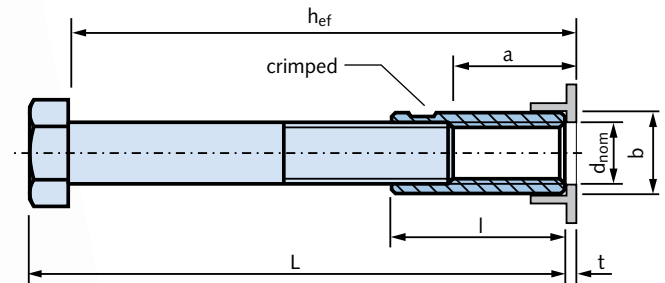

#### Anchor description

The bolt anchor 1988 FV consists of a bolt (untreated, quality 8.8) with a screwed and crimped sleeve. The sleeve with internal metric ISO thread is hot-dip galvanized (FV) and manufactured from a steel precision tube.

For identification a grey plastic clip is attached ( $t=2\text{ mm}$ ).



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.

[www.halfen.com](http://www.halfen.com) → downloads → software.

For information about our software see page 40.

Bolt anchor 1988 FV incl. identification clip (grey)

Order no.	$d_{nom} \times L$ [mm]	Dimensions				Design loads for tension ①		Design loads for shear ①	
		$h_{ef}$ [mm]	a [mm]	b [mm]	l [mm]	$N_{Rd,c}$ [kN] C20/25	$N_{Rd,c}$ [kN] C45/55	$V_{Rd,c}$ [kN] C20/25	$V_{Rd,c}$ [kN] C45/55
		0020.010-00071	M12 x 55	49.0	25	15.5	35	9.7	14.4
0020.010-00032	M12 x 100	94.0	25	15.5	35	16.7	28.9	17.3	17.3
0020.010-00033	M12 x 150	144.0	25	15.5	35	16.7	28.9	17.3	17.3
0020.010-00072	M16 x 75	67.0	31	21	45	15.5	23.1	31.1	35.2
0020.010-00034	M16 x 140	132.0	31	21	45	29.8	58.8	35.2	35.2
0020.010-00035	M16 x 220	212.0	31	21	45	29.8	58.8	35.2	35.2
0020.010-00073	M20 x 90	79.0	37	26	55	19.9	29.5	39.8	52.9
0020.010-00036	M20 x 150	139.0	37	26	55	46.4	68.9	52.9	52.9
0020.010-00037	M20 x 180	169.0	37	26	55	46.5	88.2	52.9	52.9
0020.010-00038	M20 x 270	259.0	37	26	55	46.5	88.2	52.9	52.9
0020.010-00074	M24 x 110	97.0	48	32	70	27.1	40.2	54.1	80.3
0020.010-00039	M24 x 200	187.0	48	32	70	67.0	107.5	83.1	83.1
0020.010-00040	M24 x 320	307.0	48	32	70	67.0	138.7	83.1	83.1
0020.010-00075	M30 x 160	143.0	62	40	90	48.5	71.9	96.9	126.9
0020.010-00041	M30 x 240	223.0	62	40	90	94.4	140.0	126.9	126.9
0020.010-00042	M30 x 380	363.0	62	40	90	112.6	211.7	126.9	126.9
0020.010-00044	M36 x 420	399.0	76	47.5	110	160.2	309.8	185.8	185.8


① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without load-reducing influences. Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling). Design loads are valid for permanent fixings and are not permitted for lifting!

# BOLT ANCHORS

## Bolt Anchor 1988 A4-50 / A4-80



1988 A4-50 and 1988 A4-80

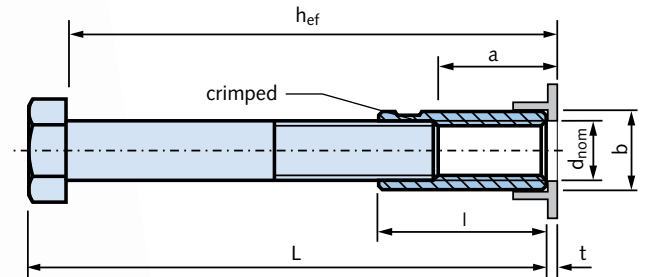

### Anchor description

The bolt anchor 1988 A4 consists of a bolt (hot-dip galvanized, quality 8.8) with a screwed and crimped sleeve. The sleeve has an internal metric ISO thread and is manufactured from stainless steel (strength class A4-50 or strength class A4-80). For identification a white/black plastic clip is attached ( $t=2\text{ mm}$ ).



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.  
[www.halfen.com](http://www.halfen.com) → downloads → software.  
 For information about our software see page 40.

Bolt anchor 1988 A4-50 incl. identification clip (white)

Order no.	$d_{nom} \times L$ [mm]	Dimensions				Design loads for tension ①		Design loads for shear ①	
		$h_{ef}$ [mm]	a [mm]	b [mm]	l [mm]	$N_{Rd,c}$ [kN] C20/25	$N_{Rd,c}$ [kN] C45/55	$V_{Rd,c}$ [kN] C20/25	$V_{Rd,c}$ [kN] C45/55
		0020.010-00060	M12 x 100	94.0	25	15.5	35	15.0	15.0
0020.010-00061	M12 x 150	144.0	25	15.5	35	15.0	15.0	9.0	9.0
0020.010-00062	M16 x 140	132.0	31	21	45	26.2	26.2	15.7	15.7
0020.010-00063	M16 x 220	212.0	31	21	45	26.2	26.2	15.7	15.7
0020.010-00064	M20 x 150	139.0	37	26	55	35.6	35.6	21.4	21.4
0020.010-00065	M20 x 180	169.0	37	26	55	35.6	35.6	21.4	21.4
0020.010-00066	M20 x 270	259.0	37	26	55	35.6	35.6	21.4	21.4


Bolt anchor 1988 A4-80 incl. identification clip (black)

0020.010-00016	M12 x 100	94.0	25	15.5	35	16.7	36.8	24.0	24.0
0020.010-00017	M12 x 150	144.0	25	15.5	35	16.7	36.8	24.0	24.0
0020.010-00018	M16 x 140	132.0	31	21	45	29.8	63.7	47.2	47.2
0020.010-00019	M16 x 220	212.0	31	21	45	29.8	65.5	47.2	47.2
0020.010-00020	M20 x 150	139.0	37	26	55	46.5	68.9	73.2	73.2
0020.010-00021	M20 x 180	169.0	37	26	55	46.5	92.3	73.2	73.2
0020.010-00067	M20 x 270	259.0	37	26	55	46.5	102.4	73.2	73.2
0020.010-00022	M24 x 200	187.0	48	32	70	67.0	107.5	106.2	106.2
0020.010-00023	M30 x 240	223.0	62	40	90	94.4	140.0	168.7	168.7

① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without load-reducing influences.  
 Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling).  
 Design loads are valid for permanent fixings and are not permitted for lifting!

# BOLT ANCHORS

## Bolt Anchor 1985 GV

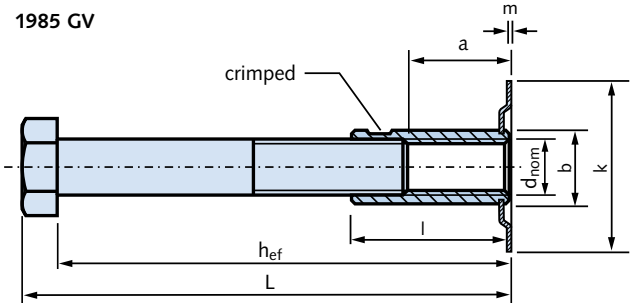

### Anchor description

The bolt anchor 1985 GV is a similar anchor to type 1988 GV but with additional nailing plate (to fix the anchor to formwork). The sleeve is zinc galvanized (GV), the internal thread is metric ISO.



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.  
[www.halfen.com](http://www.halfen.com) → downloads → software.  
 For information about our software see page 40.


Bolt anchor 1985 GV

Order no.	d <sub>nom</sub> × L [mm]	h <sub>ef</sub> [mm]	Dimensions					Design loads for tension ①		Design loads for shear ①	
			a	b	l	k	m	N <sub>Rd,c</sub> [kN] C20/25	N <sub>Rd,c</sub> [kN] C45/55	V <sub>Rd,c</sub> [kN] C20/25	V <sub>Rd,c</sub> [kN] C45/55
			[mm]	[mm]	[mm]	[mm]	[mm]				
0020.020-00001	M12 × 150	142.0	23	15.5	35	40	1.0	16.7	28.9	17.3	17.3
0020.020-00002	M16 × 140	130.0	29	21	45	44	1.5	29.8	58.8	35.2	35.2
0020.020-00003	M20 × 180	167.0	35	26	55	48	1.5	46.5	88.2	52.9	52.9
0020.020-00004	M24 × 200	185.0	46	32	70	57	1.5	67.0	107.5	83.1	83.1

① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without load-reducing influences.  
 Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling).  
 Design loads are valid for permanent fixings and are not permitted for lifting!

### Minimum allowed element thickness, minimum edge distances and spacing

#### Installation parameters / arrangement of bolt anchors 1988 and 1985:



Top view: Concrete member with 2 fixing anchors embedded.

Thread size	d	[mm]	M 12	M 16	M 20	M 24	M 30	M 36	M 42
Minimum spacing	S <sub>min</sub>	[mm]	100	100	120	150	180	220	260
Minimum edge distance	C <sub>min</sub>	[mm]	50	50	60	75	90	110	130
Minimum element thickness	h <sub>min</sub>	[mm]	h <sub>nom</sub> + C <sub>nom</sub> ②						


h<sub>nom</sub>: embedment depth; c<sub>nom</sub>: concrete cover  
 ② c<sub>nom</sub> acc. to EN 1992-1 with c<sub>nom</sub> ≥ 20 mm

# BOLT ANCHORS

## Plate Anchor 1980-P GV / FV



1980-P GV / FV

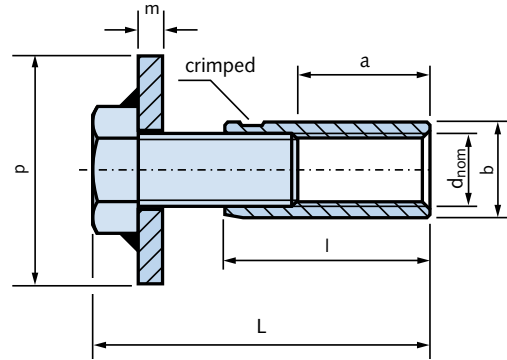

### Anchor description

The plate anchors 1980-P GV and 1980-P FV consist of a bolt (untreated, quality 8.8) and a square washer (untreated, according to DIN 436) welded together underneath the head of the bolt. The bolt is connected to a screwed on and crimped sleeve with internal metric ISO thread.

The surface treatment is either zinc galvanized (GV) or hot-dip galvanized (FV). The sleeve is manufactured from a steel precision tube.



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.

[www.halfen.com](http://www.halfen.com) → downloads → software.

For information about our software see page 40.

Plate anchor 1980-P GV

Order no.	$d_{nom} \times L$ [mm]	$h_{ef}$ [mm]	Dimensions					Design loads for tension ①		Design loads for shear ①	
			a [mm]	b [mm]	l [mm]	p [mm]	m [mm]	$N_{Rd,c}$ [kN]	$N_{Rd,c}$ [kN]	$V_{Rd,c}$ [kN]	$V_{Rd,c}$ [kN]
								C20/25	C45/55	C20/25	C45/55
0020.200-00001	M12 × 55	49.0	23	15.5	35	40	4	9.7	14.4	9.7	14.4
0020.200-00002	M16 × 75	68.0	29	21	45	50	5	15.9	23.6	31.8	35.2
0020.200-00003	M20 × 90	81.0	35	26	55	60	5	20.7	30.6	41.3	52.9
0020.200-00004	M24 × 110	100.0	46	32	70	80	6	28.3	42.0	56.7	83.1
0020.200-00005	M30 × 140	127.0	60	40	90	95	6	40.5	60.1	81.1	120.3

Plate anchor 1980-P FV

0020.200-00016	M12 × 55	49.0	23	15.5	35	40	4	9.7	14.4	9.7	14.4
0020.200-00017	M16 × 75	68.0	29	21	45	50	5	15.9	23.6	31.8	35.2
0020.200-00018	M20 × 90	81.0	35	26	55	60	5	20.7	30.6	41.3	52.9
0020.200-00019	M24 × 110	100.0	46	32	70	80	6	28.3	42.0	56.7	83.1
0020.200-00020	M30 × 140	127.0	60	40	90	95	6	40.5	60.1	81.1	120.3


① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without limitation of centre to centre distances, edge distances and element height (→ see explanation on page 19)! Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling). Design loads are valid for permanent fixings and are not permitted for lifting!

# BOLT ANCHORS

## Plate Anchor 1980-P A4-80



1980-P A4-80

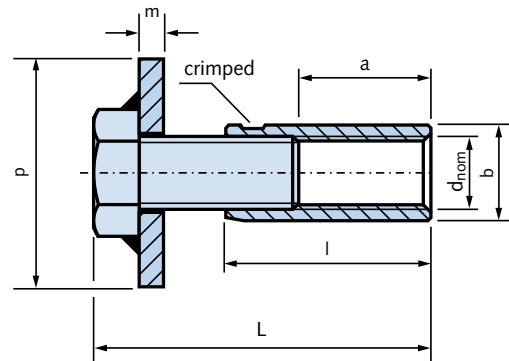

### Anchor description

The plate anchor 1980-P A4-80 consists of a bolt (untreated, quality 8.8) and a square washer (untreated, according to DIN 436) welded together underneath the head of the bolt.

The bolt is connected to a screwed and crimped sleeve with internal metric ISO thread.

The sleeve is manufactured from a stainless steel precision tube (strength class A4-80).



Please download our calculation software to calculate the load capacity of this anchor according to CEN/TS 1992-4-1/2.

[www.halfen.com](http://www.halfen.com) → downloads → software.

For information about our software see page 40.


Plate anchor 1980-P A4-80

Order no.	$d_{nom} \times L$ [mm]	$h_{ef}$ [mm]	Dimensions					Design loads for tension ①		Design loads for shear ①	
			a [mm]	b [mm]	l [mm]	p [mm]	m [mm]	$N_{Rd,c}$ [kN] C20/25	$N_{Rd,c}$ [kN] C45/55	$V_{Rd,c}$ [kN] C20/25	$V_{Rd,c}$ [kN] C45/55
0020.200-00011	M12 × 55	49.0	23	15.5	35	40	4	9.7	14.4	9.7	14.4
0020.200-00012	M16 × 75	68.0	29	21	45	50	5	15.9	23.6	31.8	47.1
0020.200-00013	M20 × 90	81.0	35	26	55	60	5	20.7	30.6	41.3	61.3
0020.200-00014	M24 × 110	100.0	46	32	70	80	6	28.3	42.0	56.7	84.1
0020.200-00015	M30 × 140	127.0	60	40	90	95	6	40.5	60.1	81.1	120.3

① The design load is the calculation value according to CEN/TS 1992-4-1/2 for tensile or shear force in plain concrete without limitation of centre to centre distances, edge distances and element height (→ see explanation below)! Values only apply for cracked concrete; no dense reinforcement (risk of shell spalling). Design loads are valid for permanent fixings and are not permitted for lifting!

### Example of fixing anchors embedded in full concrete

Example of fixing anchors embedded in full concrete without any influence of edge distances (c), centre to centre distances (s), etc.



Top view: Concrete member with 2 fixing anchors, embedded in full concrete.

### Conditions (fixing anchors loaded by tension)

$$c_{Cr,N} \geq 1.5 \times h_{ef}$$


$$s_{Cr,N} \geq 3.0 \times h_{ef}$$



The given conditions are valid for cracked concrete and present reinforcement, which resists the splitting forces (limiting the crack width to  $w_k \leq 0.3 \text{ mm}$ ).

## BAR ANCHORS

### Bar Anchor 4010 GV

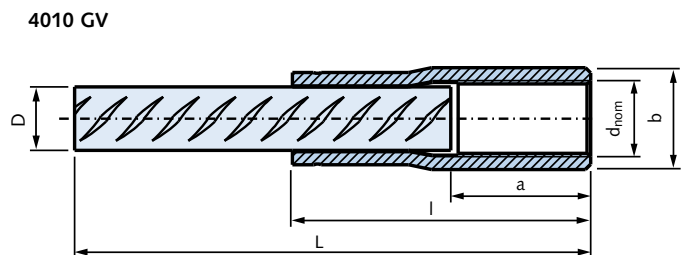

#### Anchor description

The bar anchor 4010 GV consists of a rebar B500B (untreated) according to EN 10080 (NEN 6008) with crimped sleeve. The sleeve has a metric ISO thread and is zinc galvanized (GV).

Bar anchor 4010 GV


Order no.	$d_{nom} \times L$ [mm]	D [mm]	Dimensions			$A_s$ ① [mm <sup>2</sup> ]	Design loads ②
			a [mm]	b [mm]	l [mm]		$N_{Rd,s}$ [kN] Steel
0052.070-00001	M16 × 415	12	25	21	58	113	48
0052.070-00002	M16 × 615	12	25	21	58	113	48
0052.070-00003	M16 × 840	12	25	21	58	113	48
0052.070-00022	M16 × 1040	12	25	21	58	113	48
0052.070-00004	M16 × 1540	12	25	21	58	113	48
0052.070-00024	M16 × 2040	12	25	21	58	113	48
0052.070-00006	M20 × 560	16	33	26	71	201	86
0052.070-00007	M20 × 810	16	33	26	71	201	86
0052.070-00008	M20 × 1060	16	33	26	71	201	86
0052.070-00009	M20 × 1480	16	33	26	71	201	86
0052.070-00025	M20 × 2240	16	33	26	71	201	86
0052.070-00026	M20 × 3540	16	33	26	71	201	86
0052.070-00011	M24 × 705	20	38	32	90	314	136
0052.070-00012	M24 × 1005	20	38	32	90	314	136
0052.070-00013	M24 × 1320	20	38	32	90	314	136
0052.070-00014	M24 × 1840	20	38	32	90	314	136
0052.070-00027	M24 × 2245	20	38	32	90	314	136
0052.070-00032	M24 × 3540	20	38	32	90	314	136
0052.070-00016	M30 × 1055	25	48	40	114	491	213
0052.070-00017	M30 × 1555	25	48	40	114	491	213
0052.070-00018	M30 × 2315	25	48	40	114	491	213
0052.070-00033	M30 × 3555	25	48	40	114	491	213
0052.070-00030	M42 × 1015	32	65	54	140	804	348
0052.070-00020	M42 × 1490	32	65	54	140	804	348
0052.070-00021	M42 × 2390	32	65	54	140	804	348
0052.070-00034	M42 × 3590	32	65	54	140	804	348

①  $A_s$ : stress area of the reinforcement bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values (yield strength) for pure steel of the rebars:  $N_{Rd,s} = A_s \times f_{yd}$  ( $f_{yd} = f_{yk} / 1.15$ ). In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16). The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

## BAR ANCHORS

### Bar Anchor 4010 FV

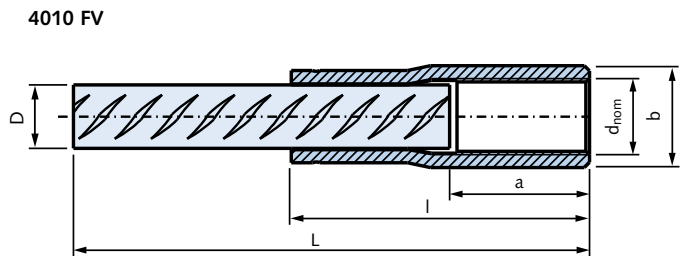

#### Anchor description

The bar anchor 4010 FV consists of a rebar B500B (untreated) according to EN 10080 (NEN 6008) with a crimped sleeve. The sleeve has a metric ISO thread and is hot-dip galvanized (FV).

Bar anchor 4010 FV

Order no.	$d_{nom} \times L$ [mm]	D [mm]	Dimensions			$A_s$ ① [mm <sup>2</sup> ]	Design loads ②
			a [mm]	b [mm]	l [mm]		$N_{Rd,s}$ [kN] Steel
0052.070-00110	M16 × 415	12	25	21	58	113	48
0052.070-00114	M16 × 615	12	25	21	58	113	48
0052.070-00111	M20 × 560	16	33	26	71	201	86
0052.070-00115	M20 × 810	16	33	26	71	201	86
0052.070-00112	M24 × 705	20	38	32	90	314	136
0052.070-00116	M24 × 1005	20	38	32	90	314	136
0052.070-00113	M30 × 1055	25	48	40	114	491	213
0052.070-00117	M30 × 1555	25	48	40	114	491	213
0052.070-00118	M42 × 1015	32	65	54	140	804	348
0052.070-00119	M42 × 1490	32	65	54	140	804	348

①  $A_s$ : stress area of the reinforcement bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values (yield strength) for pure steel of the rebars:  $N_{Rd,s} = A_s \times f_{yd}$  ( $f_{yd} = f_{yk} / 1.15$ ). In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16). The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

#### Technical Notes

According to the Dutch standard NEN 6146 "Steel bars for the reinforcement of concrete", the rebars of the bar anchors must be manufactured with a tolerance of +5 mm / -2 × diameter (of rebar) → the existing bonding length of the bar anchors can be calculated as follows:

$$L_{bd} = L - l - 2 \times D \text{ [mm]}$$

with

$$L_{bd} = \text{bonding length [mm]}$$

$$L = \text{total length of bar anchor [mm]}$$

$$l = \text{length of sleeve [mm]}$$

$$D = \text{diameter of rebar [mm]}$$


## BAR ANCHORS

### Bar Anchor 3016 GV



#### Anchor description

The bar anchor 3016 GV consists of a rebar B500B (untreated) according to EN 10080 (NEN 6008) with a screwed and crimped sleeve and with additional nailing plate (to fix the anchor to the formwork). The sleeve is zinc galvanized (GV), the internal thread

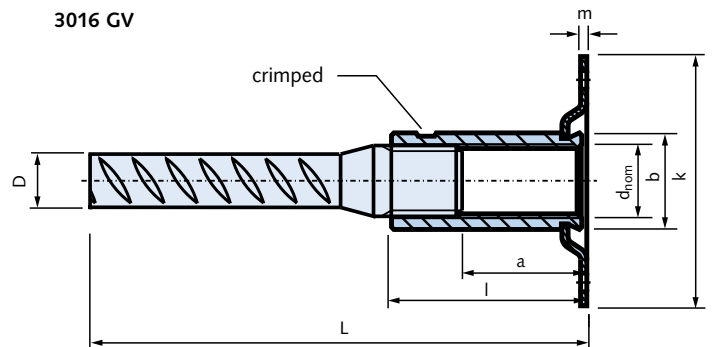

is metric ISO.

The maximum screw-in length for bolts is longer compared to the bar anchor 4010 → see table below.

Bar anchor 3016 GV

Order no.	$d_{nom} \times L$ [mm]	D [mm]	Dimensions					$A_s$ ① [mm <sup>2</sup> ]	Design loads ② $N_{Rd,s}$ [kN] Steel
			a [mm]	b [mm]	l [mm]	k [mm]	m [mm]		
0052.090-00001	M16 × 410	12	29	21	45	44	1.5	113	48
0052.090-00002	M20 × 565	16	35	26	55	48	1.5	201	86
0052.090-00003	M24 × 715	20	46	32	70	57	1.5	314	136

①  $A_s$ : stress area of the reinforcement bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values (yield strength) for pure steel of the rebars:  $N_{Rd,s} = A_s \times f_{yd}$  ( $f_{yd} = f_{yk} / 1.15$ ). In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16). The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

#### Technical Notes

According to the Dutch standard NEN 6146 "Steel bars for the reinforcement of concrete", the rebars of the bar anchors are manufactured with an allowable tolerance of +5 mm / -2 × diameter (of rebar) → the existing bonding length of the bar anchors can be calculated as follows:

$$L_{bd} = L - l - 2 \times D \text{ [mm]}$$

with

$$L_{bd} = \text{bonding length [mm]}$$

$$L = \text{total length of bar anchor [mm]}$$

$$l = \text{length of sleeve [mm]}$$

$$D = \text{diameter of rebar [mm]}$$



## BAR ANCHORS


### Bar Anchor 3010 A4-80



#### Anchor description

The bar anchor 3010 A4-80 consists of a rebar B500B (untreated) according to EN 10080 (NEN 6008) with a screwed and crimped sleeve.

#### 3010 A4-80

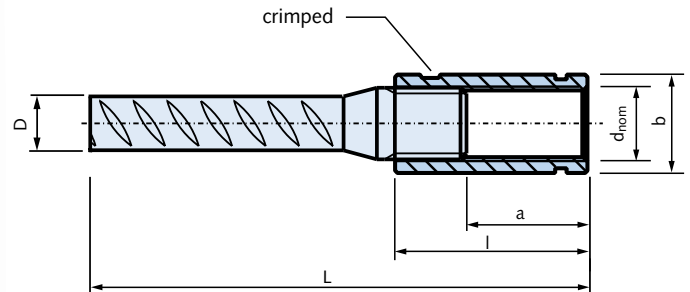

The sleeve has a metric ISO thread and is made of stainless steel (strength class A4-80).

Bar anchor 3010 A4-80

Order no.	$d_{nom} \times L$ [mm]	D [mm]	Dimensions			$A_s$ ① [mm <sup>2</sup> ]	Design loads ②
			a [mm]	b [mm]	l [mm]		$N_{Rd,s}$ [kN] Steel
0052.030-00006	M16 × 410	12	29	21	45	113	48
0052.030-00007	M20 × 565	16	35	26	55	201	86
0052.030-00008	M24 × 715	20	46	32	70	314	136
0052.030-00009	M30 × 1055	25	60	40	90	491	213

①  $A_s$ : stress area of the reinforcement bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values (yield strength) for pure steel of the rebars:  $N_{Rd,s} = A_s \times f_{yd}$  ( $f_{yd} = f_{yk} / 1.15$ ). In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16). The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

#### Technical Notes

According to the Dutch standard NEN 6146 "Steel bars for the reinforcement of concrete", the rebars of the bar anchors are manufactured with an allowable tolerance of +5 mm / -2 × diameter (of rebar) → the existing bonding length for bar anchors can be calculated as follows:

$$L_{bd} = L - l - 2 \times D \text{ [mm]}$$

with

$L_{bd}$  = bonding length [mm]


L = total length of bar anchor [mm]

l = length of sleeve [mm]

D = diameter of the rebar [mm]

## BAR ANCHORS

### Bar Anchor 1980-S GV

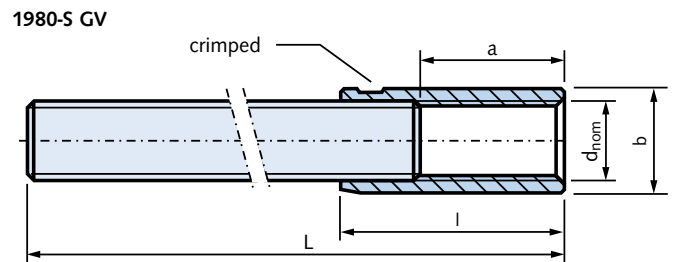

#### Anchor description

The bar anchor 1980-S GV consists of a threaded rod (untreated, quality 4.6) with a screwed and crimped sleeve. The sleeve has a metric ISO thread and the surface is zinc galvanized (GV).

Alternatively sleeves are available on request as hot-dip galvanized or in stainless steel.

Bar anchor 1980-S GV

Order no.	$d_{nom} \times L$ [mm]	Dimensions			$A_s$ ① [mm <sup>2</sup> ]	Design loads ②
		a [mm]	b [mm]	l [mm]		$N_{Rd,s}$ [kN] Steel
0020.210-00001	M12 x 400	23	15.5	35	84	17
0020.210-00002	M12 x 600	23	15.5	35	84	17

①  $A_s$ : stress area of screwed in bolt/bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values for pure steel of the threaded bars. In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16). The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

#### Technical Notes

The existing bonding length of bar anchors can be calculated as follows:

$$L_{bd} = L - l \text{ [mm]}$$

with


$L_{bd}$  = bonding length [mm]

L = total length of bar anchor [mm]

l = length of sleeve [mm]

## BAR ANCHORS

### Bar Anchor 1988-S GV

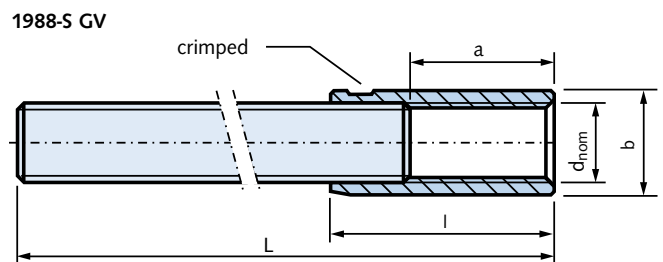

#### Anchor description

The bar anchor 1988-S GV consists of a threaded rod (untreated, quality 8.8) with a screwed and crimped sleeve. The sleeve has a metric ISO thread and the surface is zinc galvanized (GV).

Alternatively, sleeves are available on request as hot-dip galvanized or in stainless steel.

Bar anchor 1988-S GV

Order no.	$d_{nom} \times L$ [mm]	Dimensions			$A_s$ ① [mm <sup>2</sup> ]	Design loads ②
		a [mm]	b [mm]	l [mm]		$N_{Rd,s}$ [kN] Steel
0020.210-00101	M12 x 435	23	15.5	35	84	33
0020.210-00102	M12 x 635	23	15.5	35	84	33
0020.210-00103	M16 x 585	29	21	45	161	63
0020.210-00104	M20 x 735	35	26	55	245	96

①  $A_s$ : stress area of the threaded connector in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values for pure steel of the threaded connectors.

In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16).

The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

#### Technical Notes

The existing bonding length of bar anchors can be calculated as follows:

$$L_{bd} = L - l \text{ [mm]}$$

with

$L_{bd}$  = bonding length [mm]

L = total length of bar anchor [mm]


l = length of sleeve [mm]

## BAR ANCHORS

### Bar Anchor 4030 GV / FV



#### 4030 GV/FV

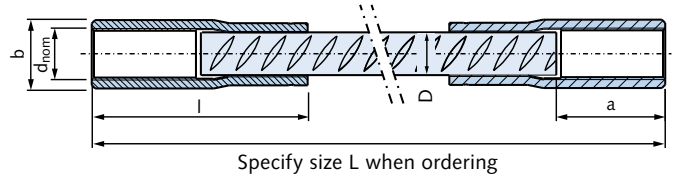

#### Anchor description

The special bar anchors 4030 GV and 4030 FV consist of a rebar B500B (untreated) according to EN 10080 (NEN 6008) with a crimped sleeve on both ends.

The sleeves have metric ISO threads and are available either in zinc galvanized (GV) or hot-dip galvanized (FV).

This product is made on request; please specify required length when ordering.

#### Bar anchor 4030 GV

Order no.	d <sub>nom</sub> - D [mm]	L min [mm]	Dimensions			A <sub>s</sub> ① [mm <sup>2</sup> ]	Design loads ②
			a [mm]	b [mm]	l [mm]		N <sub>Rd,s</sub> [kN] Steel
0052.159-00001	M16 - Ø12	225	25	21	58	113	48
0052.159-00002	M20 - Ø16	233	33	26	71	201	86
0052.159-00003	M24 - Ø20	238	38	32	90	314	136
0052.159-00004	M30 - Ø25	338	48	40	114	491	213
0052.159-00005	M42 - Ø32	395	65	54	140	804	348

#### Bar anchor 4030 FV

0052.159-00011	M16 - Ø12	225	25	21	58	113	48
0052.159-00012	M20 - Ø16	233	33	26	71	201	86
0052.159-00013	M24 - Ø20	238	38	32	90	314	136
0052.159-00014	M30 - Ø25	338	48	40	114	491	213
0052.159-00015	M42 - Ø32	395	65	54	140	804	348

① A<sub>s</sub>: stress area of the reinforcement bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values for pure steel of the rebars:  $N_{Rd,s} = A_s \times f_{yd}$  ( $f_{yd} = f_{yk} / 1.15$ ).

In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16).


The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

## BAR ANCHORS

### Spacer 1554 GV / FV



1554 GV/FV

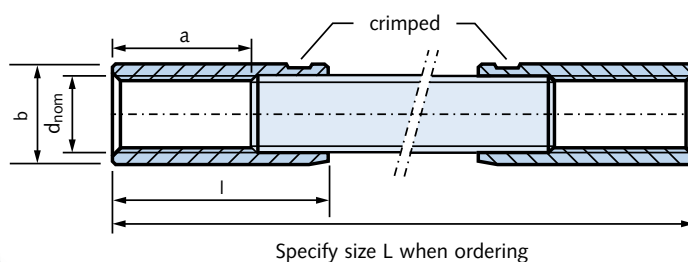

#### Anchor description

The bar anchors 1554 GV and 1554 FV consist of a threaded rod (untreated, quality 4.6) with screwed and crimped sleeves on both ends. The sleeves have metric ISO threads and are available with a surface treatment either in zinc galvanized (GV) or in hot-dip galvanized (FV).

This product is made on request; please specify required length when ordering.

Spacer 1554 GV								
Order no.	d <sub>nom</sub> [mm]	L min [mm]	Dimensions				A <sub>s</sub> ① [mm <sup>2</sup> ]	Design loads②
			a [mm]	b [mm]	l [mm]	N <sub>Rd,s</sub> [kN] Steel		
0020.229-00001	M12	200	23	15.5	35	84	17	
0020.229-00002	M16	200	29	21	45	157	31	
0020.229-00003	M20	200	35	26	55	245	49	
0020.229-00004	M24	200	46	32	70	355	71	
0020.229-00005	M30	220	60	40	90	560	112	
0020.229-00006	M36	250	74	47.5	110	817	163	
0020.229-00007	M42	250	68	54	110	1122	224	


Spacer 1554 FV							
0020.229-00011	M12	200	23	15.5	35	84	17
0020.229-00012	M16	200	29	21	45	157	31
0020.229-00013	M20	200	35	26	55	245	49
0020.229-00014	M24	200	46	32	70	355	71
0020.229-00015	M30	220	60	40	90	560	112
0020.229-00016	M36	250	74	47.5	110	817	163
0020.229-00017	M42	250	68	54	110	1122	224

① A<sub>s</sub>: stress area of screwed in bolt/bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values for pure steel of the threaded bars. In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16). The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

## BAR ANCHORS

### Spacer 1554 A4-80

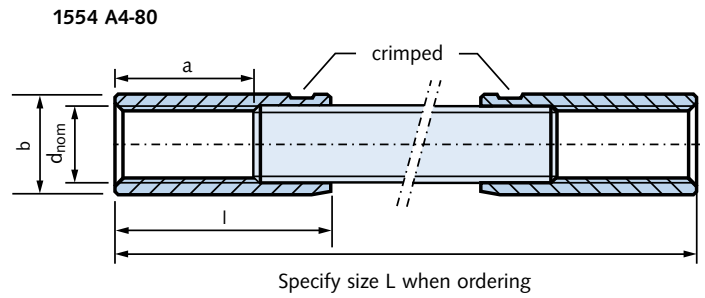

#### Anchor description

The bar anchor 1554 A4-80 consists of a threaded rod (untreated, quality 4.6) with screwed and crimped sleeves on both ends. The sleeves have metric ISO threads and are made of stainless steel (strength class A4-80).

This product is made to order; please specify required length when ordering.

Spacer 1554 A4-80

Order no.	$d_{nom}$ [mm]	L min [mm]	Dimensions				$A_s$ ① [mm <sup>2</sup> ]	Design loads ②
			a [mm]	b [mm]	l [mm]	$N_{Rd,s}$ [kN] Steel		
0020.229-00021	M12	200	23	15.5	35	84	17	
0020.229-00022	M16	200	29	21	45	157	31	
0020.229-00023	M20	200	35	26	55	245	49	
0020.229-00024	M24	200	46	32	70	355	71	
0020.229-00025	M30	220	60	40	90	560	112	

①  $A_s$ : stress area of screwed in bolt/bar in mm<sup>2</sup>.


② Design loads are for tension and are the maximum values for pure steel of the threaded bars.

In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16).

The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

## BAR ANCHORS

### Spacer 1558 GV / FV

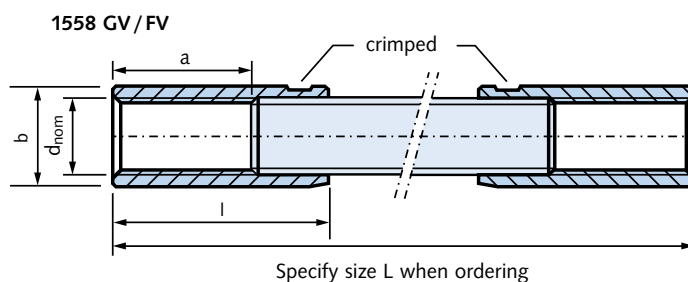

#### Anchor description

The bar anchors 1558 GV and 1558 FV consist of a threaded rod (untreated, quality 8.8) with screwed and crimped sleeves on both ends. The sleeves have metric ISO threads and are available either zinc galvanized (GV) or hot-dip galvanized (FV).

This product is made on request; please specify required length when ordering.

Spacer 1558 GV							
Order no.	d <sub>nom</sub> [mm]	L min [mm]	Dimensions			A <sub>s</sub> ① [mm <sup>2</sup> ]	Design loads ②
			a [mm]	b [mm]	l [mm]		N <sub>Rd,s</sub> [kN] Steel
0020.229-00101	M12	200	23	15.5	35	84	33
0020.229-00102	M16	200	29	21	45	161	63
0020.229-00103	M20	200	35	26	55	245	96
0020.229-00104	M24	200	46	32	70	385	150
0020.229-00105	M30	220	60	40	90	605	237
0020.229-00106	M36	250	74	47.5	110	826	323
0020.229-00107	M42	250	68	54	110	1002	392

Spacer 1558 FV							
Order no.	d <sub>nom</sub> [mm]	L min [mm]	Dimensions			A <sub>s</sub> ① [mm <sup>2</sup> ]	Design loads ②
			a [mm]	b [mm]	l [mm]		N <sub>Rd,s</sub> [kN] Steel
0020.229-00111	M12	200	23	15.5	35	84	33
0020.229-00112	M16	200	29	21	45	161	63
0020.229-00113	M20	200	35	26	55	245	96
0020.229-00114	M24	200	46	32	70	385	150
0020.229-00115	M30	220	60	40	90	605	237
0020.229-00116	M36	250	74	47.5	110	826	323
0020.229-00117	M42	250	68	54	110	1002	392

① A<sub>s</sub>: stress area of the threaded connector in mm<sup>2</sup>.


② Design loads are for tension and are the maximum values for pure steel of the threaded connectors.

In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16).

The required bonding strength depends mainly on the strength class of the concrete and has to be verified.

## BAR ANCHORS

### Spacer 1558 A4-80

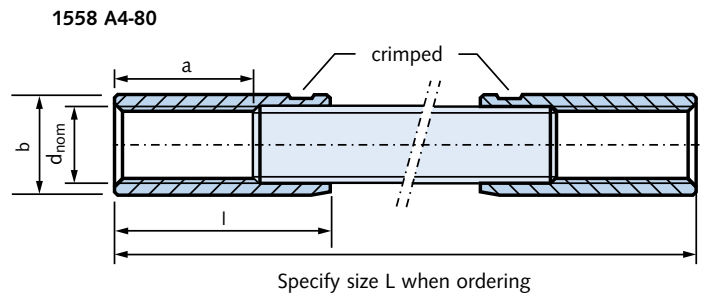

#### Anchor description

The bar anchor 1558 A4-80 consists of a threaded rod (untreated, quality 8.8) with screwed and crimped sleeves on both ends. The sleeves have metric ISO threads and are made of stainless steel (strength class A4-80).

This product is made on request; please specify required length when ordering.

Spacer 1558 A4-80

Order no.	d <sub>nom</sub> [mm]	L min [mm]	Dimensions				A <sub>S</sub> <sup>①</sup> [mm <sup>2</sup> ]	Design loads <sup>②</sup>
			a [mm]	b [mm]	l [mm]	N <sub>Rd,s</sub> [kN] Steel		
0020.229-00121	M12	200	23	15.5	35	84	45	
0020.229-00122	M16	200	29	21	45	157	84	
0020.229-00123	M20	200	35	26	55	245	131	
0020.229-00124	M24	200	46	32	70	355	189	
0020.229-00125	M30	220	60	40	90	560	299	

① A<sub>S</sub>: stress area of screwed in bolt/bar in mm<sup>2</sup>.

② Design loads are for tension and are the maximum values for pure steel of the threaded bars.

In addition, the load capacity of the bar anchor embedded in concrete has to be checked for compliance with EN 1992-1-1, chapter 8.4 (NEN 6720 art. 9.6 and 9.16).

The required bonding strength depends mainly on the strength class of the concrete and has to be verified.




# BAR ANCHORS


## Bending of bar anchors

### Custom bending

1980-S

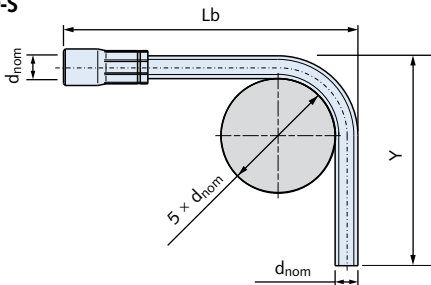

4010

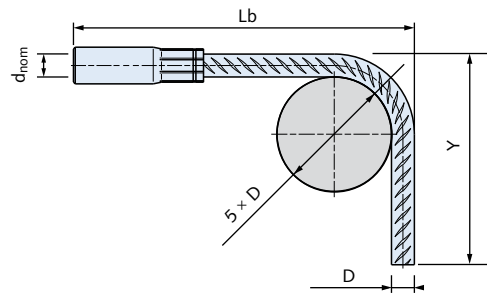

#### 1980-S

Bending L	d <sub>nom</sub> [mm]	Y min [mm]	Lb min [mm]	V <sup>③</sup> [mm]
max. 1250 mm	M12	200	145	33
max. 1250 mm	M16	200	165	45
max. 1250 mm	M20	200	195	55

③ V = Change of length;  $L = Lb + Y - V$

Note: Required bonding length has to be verified acc. to valid national standards


#### 4010

D [mm]	d <sub>nom</sub> [mm]	Y min [mm]	Lb min [mm]	V <sup>③</sup> [mm]
Ø12	M16	200	140	33
Ø16	M20	200	160	45
Ø20	M24	200	210	55
Ø25	M30	290	275	70
Ø32	M42	330	325	90

③ V = Change of length;  $L = Lb + Y - V$

Note: Required bonding length has to be verified acc. to valid national standards

3010 - 3016

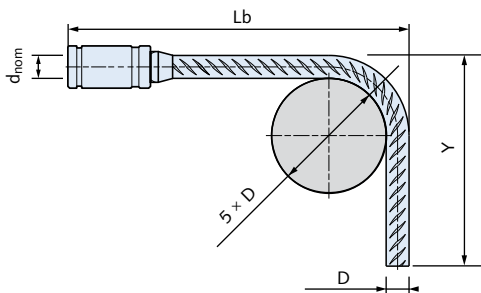


#### 3010 - 3016

D [mm]	d <sub>nom</sub> [mm]	Y min [mm]	Lb min [mm]	V <sup>③</sup> [mm]
Ø12	M16	200	145	33
Ø16	M20	200	185	45
Ø20	M24	200	215	55
Ø25	M30	290	280	70

③ V = Change of length;  $L = Lb + Y - V$

Note: Required bonding length has to be verified acc. to valid national standards

U-shaped bar anchors

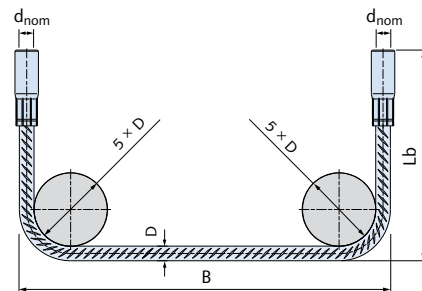

#### U-shaped

D [mm]	d <sub>nom</sub> [mm]	B min [mm]	Lb min [mm]	2 * V <sup>③</sup> [mm]
Ø12	M16	140	140	66
Ø16	M20	165	160	90
Ø20	M24	210	210	110
Ø25	M30	290	275	140
Ø32	M42	350	325	180

③ V = Change of length;  $L = Lb + Y - V$

Note: Required bonding length has to be verified acc. to valid national standards



- 1988-S 8.8 cannot be bent!
- Bent bar anchors are made to order

## SOCKET ANCHORS

### HALFEN VEMO Socket Anchors

#### General information

The HALFEN VEMO Socket anchors are light-duty fixing anchors with low load capacities, mainly used for temporary fixings and applications with no structural significance. There is currently no calculation method to calculate the load capacity of the majority of the socket anchors.

For technical questions please contact our Technical Department,  
→ contact information see back cover.

#### Material and corrosion protection

- Zinc galvanization (GV)


These socket anchors are manufactured from a welded steel precision tube (cold sized) in accordance with EN 10305-3 (strength class E235). The surface is zinc galvanized, the internal thread is metric ISO.

- Stainless steel (A4)

The socket anchors in A4 material are manufactured from a welded stainless steel tube in accordance with EN 10217-7 (strength class A4-50). The internal thread is metric ISO.


### HALFEN VEMO - Socket anchors

#### 995-GB GV




995-GB GV				
Order no.	$d_{nom} \times L$ [mm]	a [mm]	g [mm]	b [mm]
0020.060-00035	M6 × 30	14	6.0	8.5
0020.060-00001	M6 × 40	20	6.0	8.5
0020.060-00002	M8 × 40	18	8.1	10.5
0020.060-00003	M8 × 50	25	8.1	10.5

#### 995-G GV / A4



995-G GV				
Order no.	$d_{nom} \times L$ [mm]	a [mm]	g [mm]	b [mm]
0020.060-00004	M10 × 50	20	6.2	13.5
0020.060-00005	M12 × 60	23	7.2	17.0
0020.060-00006	M12 × 70	30	7.2	17.0
0020.060-00007	M16 × 70	25	9.2	21.3
0020.060-00008	M16 × 80	25	12.2	21.3
0020.060-00009	M16 × 100	32	9.2	21.3
0020.060-00010	M16 × 120	45	12.2	21.3
0020.060-00011	M20 × 100	40	12.2	26.9
0020.060-00012	M20 × 120	40	14.2	26.9
0020.060-00013	M24 × 120	50	14.2	33.7
0020.060-00014	M30 × 150	70	15.2	42.0

#### 995 A4




995 A4			
Order no.	$d_{nom} \times L$ [mm]	a [mm]	b [mm]
0020.100-00009	M6 × 40	25	8.5

995-G A4				
Order no.	$d_{nom} \times L$ [mm]	a [mm]	g [mm]	b [mm]
0020.060-00015	M8 × 50	20	7.0	10.5
0020.060-00016	M10 × 50	20	6.2	13.5
0020.060-00017	M12 × 60	25	9.2	17.0
0020.060-00018	M16 × 80	25	12.2	21.3
0020.060-00019	M16 × 100	25	12.2	21.3
0020.060-00020	M20 × 100	40	14.2	26.9
0020.060-00021	M24 × 120	50	14.2	33.7


# SOCKET ANCHORS

## HALFEN VEMO Socket Anchors

### 995-DG GV




995-DG GV				
Order no.	$d_{nom} \times L$ [mm]	a [mm]	g [mm]	b [mm]
0020.030-00001	M12 × 60	22	10	16.0
0020.030-00002	M16 × 75	22	13	21.5
0020.030-00007	M16 × 100	35	13	21.5
0020.030-00003	M20 × 90	25	15	27.0
0020.030-00008	M20 × 120	45	15	27.0
0020.030-00004	M24 × 100	30	17	32.0
0020.030-00005	M30 × 135	35	22	40.0

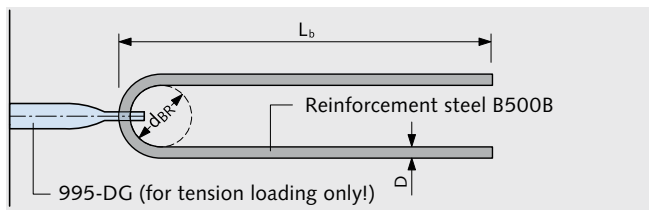

Additional reinforcement (not in scope of delivery)

### 1036-G GV / A4




1036-G GV						
Order no.	$d_{nom} \times L$ [mm]	a [mm]	g [mm]	b [mm]	k [mm]	m [mm]
0020.070-00001	M10 × 50	20	6.2	13.5	34	1
0020.070-00002	M12 × 70	30	7.2	17.0	40	1
0020.070-00003	M16 × 80	25	12.2	21.3	44	1.5
0020.070-00004	M16 × 100	32	9.2	21.3	44	1.5
0020.070-00005	M20 × 100	40	12.2	26.9	48	1.5
0020.070-00006	M24 × 120	50	14.2	33.7	57	1.5

1036-G A4						
Order no.	$d_{nom} \times L$ [mm]	a [mm]	g [mm]	b [mm]	k [mm]	m [mm]
0020.070-00008*	M10 × 50	20	6.2	13.5	34	1
0020.070-00009	M12 × 60	25	9.2	17.0	40	1
0020.070-00007	M16 × 80	25	12.2	21.3	48	1.5
0020.070-00010	M20 × 100	40	14.2	26.9	48	1.5


\* including sealing cap type 2244 (see page 35)

### 1130 GV



1130 GV						
Order no.	$d_{nom} \times L$ [mm]	a [mm]	j [mm]	b [mm]	k [mm]	m [mm]
0020.050-00001	M10 × 60	35	25	13.5	34	1
0020.050-00002	M12 × 70	40	30	17.0	40	1
0020.050-00003	M16 × 100	32	35	21.3	44	1.5
0020.050-00004	M20 × 100	40	35	26.9	48	1.5

### 1140 GV / A4



1140 GV				
Order no.	$d_{nom} \times L$ [mm]	a [mm]	j [mm]	b [mm]
0020.040-00001	M8 × 50	30	20	10.5
0020.040-00002	M10 × 60	35	25	13.5
0020.040-00003	M12 × 45	18	25	17.0
0020.040-00004	M12 × 70	40	30	17.0
0020.040-00005	M16 × 60	24	30	21.3
0020.040-00006	M16 × 100	32	35	21.3
0020.040-00007	M20 × 70	30	30	26.9
0020.040-00008	M20 × 100	40	35	26.9
0020.040-00009	M24 × 80	24	35	33.7

1140 A4				
Order no.	$d_{nom} \times L$ [mm]	a [mm]	j [mm]	b [mm]
0020.040-00010	M8 × 50	30	20	10.5
0020.040-00011	M10 × 60	35	25	13.5
0020.040-00012	M12 × 70	40	30	17.0
0020.040-00013	M16 × 100	32	35	21.3


# ACCESSORIES

## HALFEN DEMU Accessories

### Accessories

We provide numerous accessories, which facilitate the installation of all anchoring systems. See page 37 for further information on assembly.

#### 2250

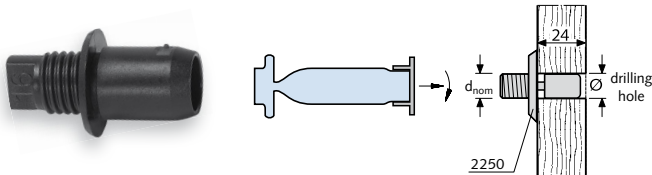


#### Fixing pin

- Hammer the fixing pin into the hole in the formwork
- Screw on the anchor
- Pour the concrete
- After the concrete has cured remove the formwork
- Unscrew and remove the pin to continue installation

2250				
Order no.	d <sub>nom</sub> [mm]	Drilling [mm]	Colour	Breaking load (shear) [kN]
0021.020-00001	M6	∅11 × 23	green	0.6
0021.020-00002	M8	∅11 × 23	blue	
0021.020-00003	M10	∅11 × 23	yellow	
0021.020-00004	M12	∅11 × 23	red	
0021.020-00005	M16	∅17 × 24	black	0.9
0021.020-00006	M20	∅17 × 24	white	
0021.020-00007	M24	∅17 × 24	blue	


#### 2282

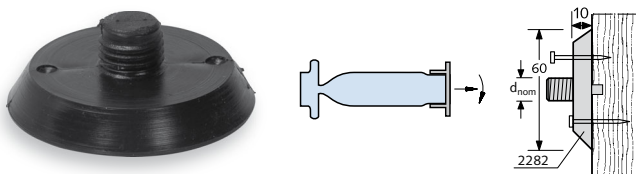

#### Nailing plate h = 10 mm, with nail holes and fixing pin

2282				
Order no.	d <sub>nom</sub> [mm]	h [mm]	∅ [mm]	Colour
0021.120-00001	M16	10	60	black
0021.120-00002	M20	10	60	yellow


#### 2280

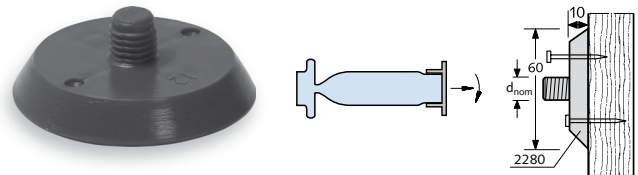

#### Nailing plate h = 10 mm, with nail holes

2280				
Order no.	d <sub>nom</sub> [mm]	h [mm]	∅ [mm]	Colour
0021.010-00001	M8	10	60	blue
0021.010-00002	M10	10	60	yellow
0021.010-00003	M12	10	60	red
0021.010-00004	M16	10	60	black
0021.010-00005	M20	10	60	yellow
0021.010-00006	M24	10	60	blue
0021.010-00007	M30	7	60	grey

#### 2275

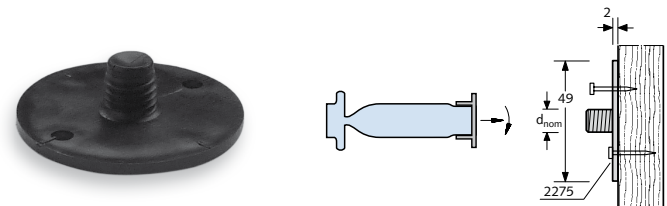


#### Nailing plate h = 2 mm, with nail holes

2275				
Order no.	d <sub>nom</sub> [mm]	h [mm]	∅ [mm]	Colour
0021.090-00001	M10	2	49	white
0021.090-00002	M12	2	49	black
0021.090-00003	M16	2	49	green
0021.090-00004	M20	2	49	red
0021.090-00005	M24	2	49	yellow

## ACCESSORIES

### HALFEN DEMU Accessories

#### 2600

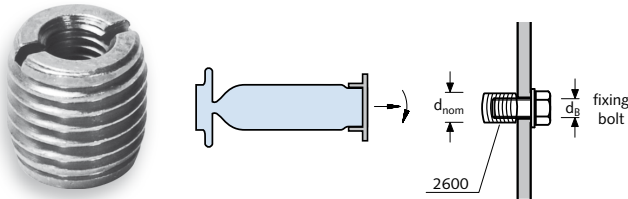


#### Thread adapter

Reduces the diameter of holes in formwork.  
Zinc galvanized and reusable.

2600		
Order no.	$d_{nom}$ [mm]	$d_B$ [mm]
0021.060-00001	M12	M6
0021.060-00002	M16	M8
0021.060-00003	M20	M8
0021.060-00004	M24	M10
0021.060-00005	M30	M10
0021.060-00006	M36	M10
0021.060-00007	M42	M12

$d_B$  = Diameter of fixing bolt  
length of thread adapter  $l = 16$  mm

#### 2244

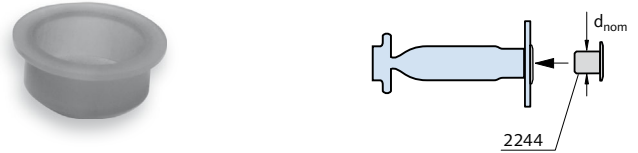

#### Sealing cap


Protects the thread against dirt and water.

2244			
Order no.	$d_{nom}$ [mm]	Size [mm]	Colour
0021.030-00001	M6	5.5	red
0021.030-00002	M8	7.0	red
0021.030-00003	M10	9.0	red
0021.030-00004	M12	11.0	red
0021.030-00005	M16	14.5	black
0021.030-00006	M20	18.0	blue
0021.030-00007	M24	21.5	red
0021.030-00008	M30	27.0	white
0021.030-00009	M36	33.5	white
0021.030-00010	M42	38.4	white

### Anchor groups – positioning plates (templates) for easy installation

#### Positioning plate

HALFEN Positioning plates (templates) allow easy and precise installation of groups of 2 up to 8 fixing anchors.

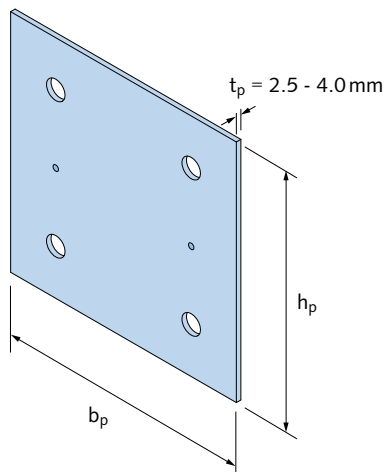

Positioning plate	
Order no.	Material
1060.409-00001	Zinc galvanized/Hot-dip galvanized
1060.409-00003	Stainless steel A4

#### Specifications required for orders


- please supply detailed drawings
- positioning plate:  $b_p$ ,  $h_p$ , number, position and diameter of bolt-holes, type of corrosion-protection, position and diameter of nail-holes

Further details and assembly steps see page 36.

# ACCESSORIES

## HALFEN DEMU Accessories





### Anchor groups – positioning plate (template) for easy installation

Flat-headed assembly bolt for positioning plate – 3 mm head				
	Article name: type nominal size	Order no.	Nominal size	Length L [mm]
	Flat-headed bolt M12	1060.410-00004	M12	20
	Flat-headed bolt M16	1060.410-00001	M16	25
	Flat-headed bolt M20	1060.410-00002	M20	25

Sealing accessory for concreting			
	Article name	Order no.	Description
	Foam tape	1060.420-00001	Self-adhesive foam tape 15 x 15 mm, length 1000 mm

### Positioning plate – assembly steps



















- 1 HALFEN DEMU Fixing anchors with identification caps are screwed onto the prefabricated positioning plate with flat headed bolts (bolt-head 3 mm).
- 2 Cut stripes of self-adhesive foam tape and fix between the positioning plate and the formwork, to prevent concrete seepage.
- 3 The positioning plate with the attached fixing anchors is secured either with nails to timber formwork or with magnets to steel formwork. Long and heavy fixing anchors, bolt anchor 1988 M24 x 320 or bigger, should be additionally wired to the reinforcement. After the concrete has cured and the formwork has been removed, the flat headed bolts can be unscrewed and the positioning plate can be removed. Use sealing caps to protect the threads against water and dirt before final installation.
- 4 The attachment can be bolted into position.

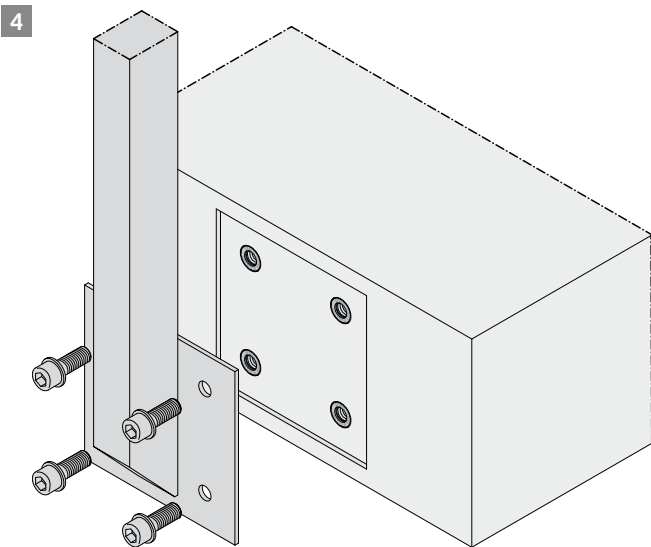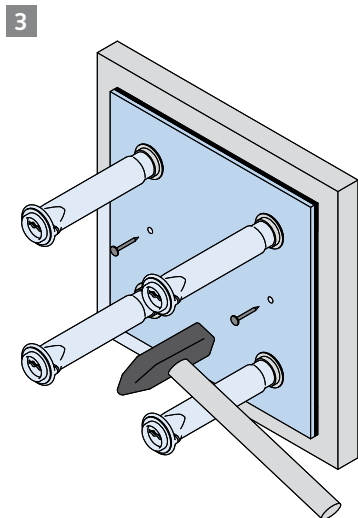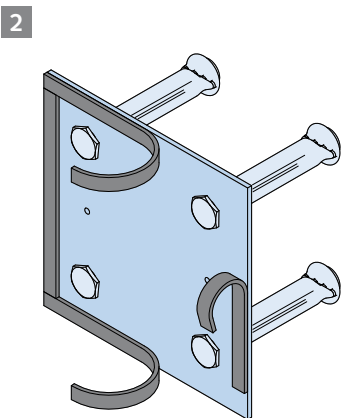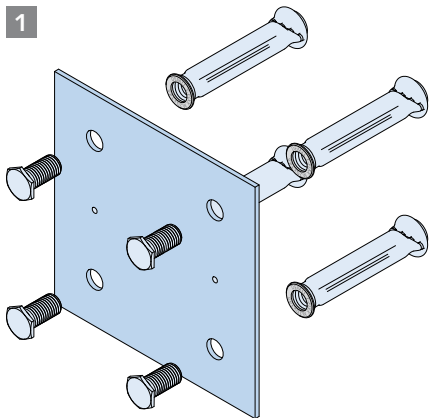

# INSTALLATION INSTRUCTIONS

## Fixing Anchors

### Assembly steps

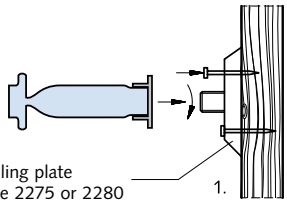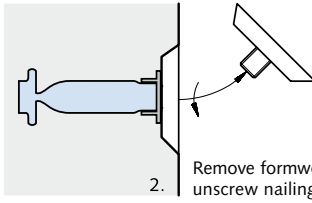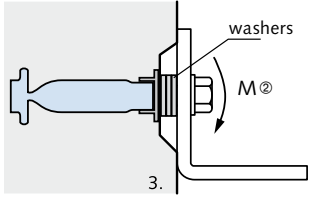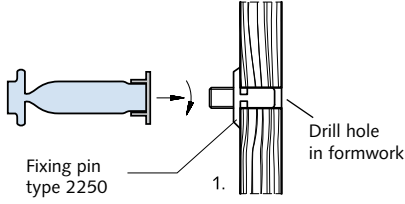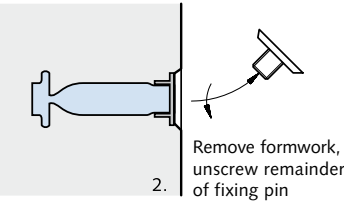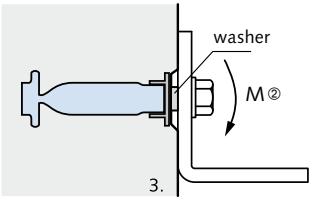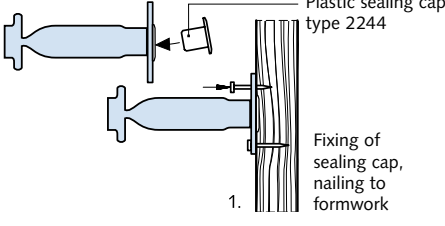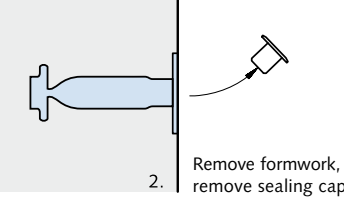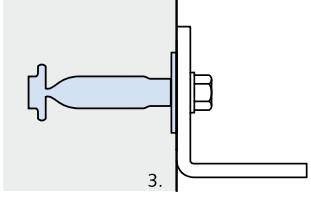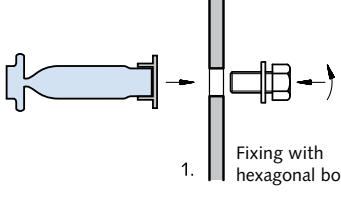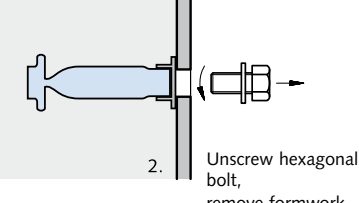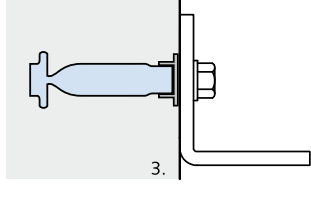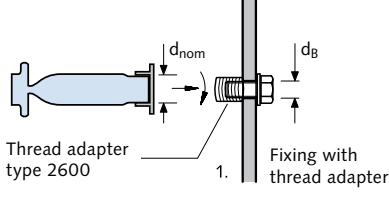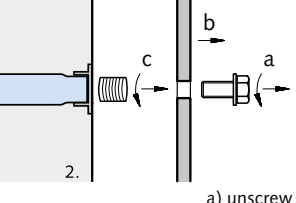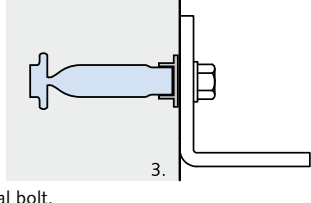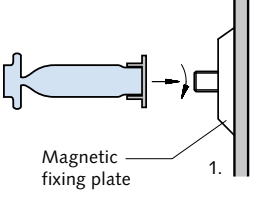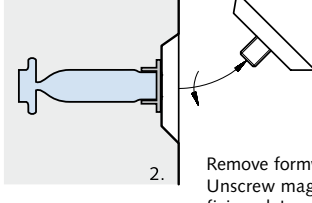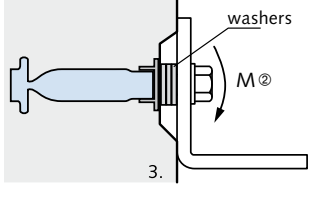	Fixing to the formwork	Preparing for assembly	Screwing-in and fixing the bolt ①
<b>Case A</b> with plastic nailing plate Nailing plate type 2275 or 2280	 <p>1. Assembly of nailing plate</p>	 <p>2. Remove formwork, unscrew nailing plate</p>	 <p>3. washers M<sup>2</sup></p>
<b>Case B</b> with plastic fixing pin Fixing pin type 2250	 <p>1. Drill hole in formwork</p>	 <p>2. Remove formwork, unscrew remainder of fixing pin</p>	 <p>3. washer M<sup>2</sup></p>
<b>Case C</b> Fixing anchors with nailing plate Plastic sealing cap type 2244	 <p>1. Fixing of sealing cap, nailing to formwork</p>	 <p>2. Remove formwork, remove sealing cap</p>	 <p>3.</p>
<b>Case D</b> with hexagonal bolt	 <p>1. Fixing with hexagonal bolt</p>	 <p>2. Unscrew hexagonal bolt, remove formwork</p>	 <p>3.</p>
<b>Case E</b> with thread adapter and hexagonal bolt Thread adapter type 2600	 <p>1. Fixing with thread adapter</p>	 <p>2.</p>	 <p>3.</p> <p>a) unscrew hexagonal bolt, b) remove formwork, c) remove thread adapter</p>
<b>Case F</b> with magnetic fixing plate on steel formwork Magnetic fixing plate	 <p>1. Magnetic fixing plate</p>	 <p>2. Remove formwork, Unscrew magnetic fixing plate</p>	 <p>3. washers M<sup>2</sup></p>

① Torque  $T_{inst}$  → see table on page 38

② Bending of bolt has to be verified! (Bolt is not included in scope of delivery)

# INSTALLATION INSTRUCTIONS

## Fixing Anchors and Accessories

### Installation parameters

#### General notes on installation

Before installing the fixing components, check whether the inside of the sockets and sleeves are dry and free from any contamination. To guarantee best possible bond between the fixing anchor and the concrete, make sure that the surface of the anchor is free from dirt, oil, etc.

The concrete has to be poured carefully; please avoid direct contact between the compacting device and the fixing anchor.

The fixing anchors may be embedded flush or recessed in the concrete. It is strongly recommended to use washers to shim if anchors are recessed. **After striking the formwork, the inside of the threaded sockets must be protected against ingress of water, dirt or oil until required for use i.e. for fixing components. Ensure the inside of the socket remains dry after final assembly.**

The fixing component (bolt with standard metric thread) has to be selected according to the static engineer's specifications. Minimum screw-in length (s) for bolts and maximum installation torque ( $T_{inst}$ ) can be found in the adjacent tables.

The fixing anchor must not be subjected to full load capacity until the concrete has reached its final strength.

The complete assembly instruction for HALFEN DEMU Fixing anchors in various languages can be found at [www.halfen.com](http://www.halfen.com)



T-FIXX®		
Thread-size	Minimum screw-in length s [mm]	Torque $T_{inst}$ [Nm]*
M10	17.0	≤ 8
M12	20.0	≤ 10
M16	26.0	≤ 30
M20	32.0	≤ 60

Bolt anchor 1988		
Thread-size	Minimum screw-in length s [mm]	Torque $T_{inst}$ [Nm]*
M12	16.4	≤ 10
M16	21.2	≤ 30
M20	26.0	≤ 50
M24	30.8	≤ 90
M30	38.0	≤ 180
M36	45.2	≤ 250
M42	52.4	≤ 300

Bolt anchor 1985		
Thread-size	Minimum screw-in length s <sup>①</sup> [mm]	Torque $T_{inst}$ [Nm]*
M12	18.0	≤ 10
M16	24.0	≤ 30
M20	30.0	≤ 50
M24	36.0	≤ 90

① value  $s = 1.5 \times d_{nom}$

Bolt anchor 1980-P / Bar anchor		
Thread-size	Minimum screw-in length s <sup>②</sup> [mm]	Torque $T_{inst}$ [Nm]*
M12	14.4	≤ 10
M16	19.2	≤ 30
M20	24.0	≤ 50
M24	28.8	≤ 90
M30	36.0	≤ 180
M36	43.2	≤ 250
M42	50.4	≤ 300

② value  $s = 1.2 \times d_{nom}$ ; for bar anchors type 3016 (secured to the formwork with integrated nailing plates), the values have to be increased by 25% → ( $s = 1.5 \times d_{nom}$ )

Socket anchors		
Thread-size	Minimum screw-in length s <sup>③</sup> [mm]	Torque $T_{inst}$ [Nm]*
M6	7.2	≤ 1
M8	9.6	≤ 2
M10	12.0	≤ 4
M12	14.4	≤ 8
M16	19.2	≤ 17
M20	24.0	≤ 25
M24	28.8	≤ 53
M30	36.0	≤ 96

③ value  $s = 1.2 \times d_{nom}$ ; for socket anchors type 1130, 1136-G (secured to the formwork with integrated nailing plates), the values have to be increased by 25% → ( $s = 1.5 \times d_{nom}$ )

\* The tightening torques apply for bolts in unlubricated condition.



# FIXING COMPONENTS – ASSEMBLY INSTRUCTION

## Determining Bolt Length

### General

The fixture is attached to the cast-in anchor with a standard metric thread fastening bolt and washer or a threaded rod, a washer and a nut.

The fixing components are not included with the HALFEN DEMU Fixing systems and have to be ordered separately. The fixing component (bolt) has to be selected according to the static engineer's specifications.

### Screw-in length of bolt

For all fixing anchors there is a minimum and a maximum screw-in length. Minimum values can be found in chapter "Installation instructions", page 38. The corresponding maximum values for each type can be found in the tables of the respective chapters (pages 12 – 33). To find the required bolt length, proceed as described below.

### Determining of bolt length

#### Determining the required bolt length ( $L_s$ )

Bolt length ( $L_s$ )

$$L_{s,min} = s + k \text{ (minimum bolt length)}$$

$$L_{s,max} = a + k \text{ (maximum bolt length)}$$

- $k$  = clamp thickness  
(thickness of the steel angle support and the washers)
- $s$  = minimum screw-in length (→ see tables on page 38)
- $a$  = maximum screw-in length (→ see tables on pages 12 – 33)

#### Example for determining bolt length



Recessed T-FIXX M12×70  
secured to the framework with  
a plastic nailing plate (type 2275)

$$L_{s,min} = 1.5 \times d_{nom} + k = 18 + 17 = 35$$

$$L_{s,max} = a + k = 36 + 17 = 53$$

→ bolt M12×40

Fixing T-FIXX M12×70 to formwork  
with plastic nailing plate

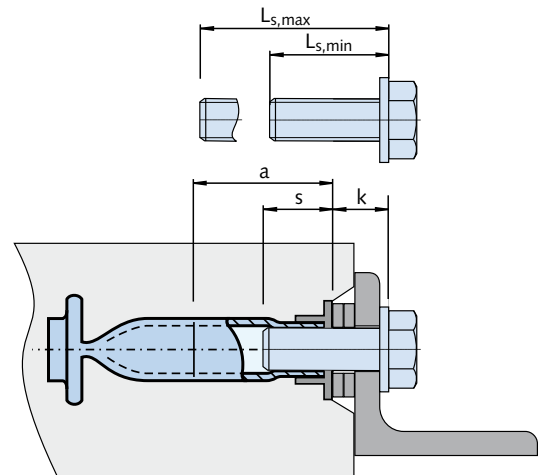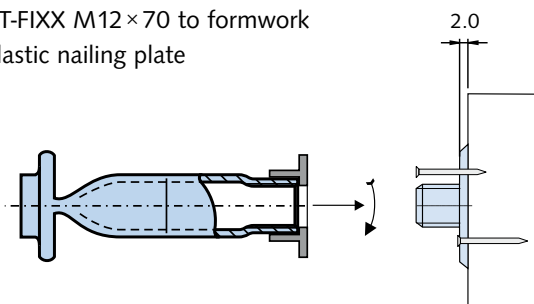

Hexagon bolt M12 x  $L_s$

Washer 3.0

Steel angle support, e.g.  $d = 12.0$

Washer 2.0


T-FIXX M12 x 70

$s = 18$

(min. screw-in length)

$s = 36$

(max. screw-in length)

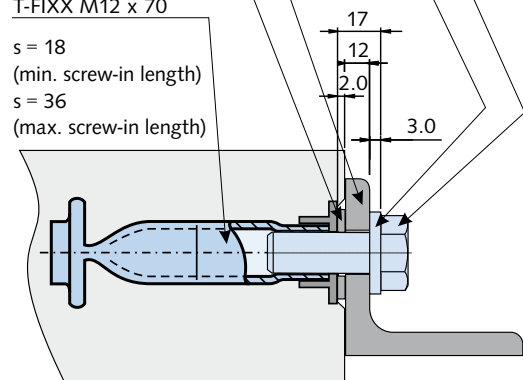

all dimensions in [mm]

## SOFTWARE

### Calculation Basics

#### General

The following information is required to verify a fixing anchor:

- type and material of HALFEN DEMU Fixing anchor
- size of HALFEN DEMU Fixing anchor (M-thread and length)
- number of fasteners (single anchor or groups up to 8 anchors)
- position of the HALFEN DEMU Fixing anchors in the concrete, determined by its distance from the lower, the upper, the left and right edges of the component
- thickness of the concrete component
- concrete strength class
- condition of the concrete: cracked or verified as non-cracked
- presence of (dense) reinforcement in the vicinity of the fixing anchor (yes/no)
- tensile load, shear load and bending, torsional moments

#### Technical support

We can provide additional engineering services and technical support for your individual projects. Contact information can be found on the back cover.

#### Verification method

##### Tension loading

- verify steel failure of fastener
- verify pull-out failure
- verify concrete cone failure
- verify splitting failure
- verify blow-out failure

##### Shear loading

- verify steel failure of fastener (with or without lever arm)
- verify concrete pry-out failure
- verify concrete edge failure

##### Verify combination of tension and shear loading

#### Software download



**Note:**

A simple to use software to simplify calculation can be downloaded free at:  
**[www.halfen.com](http://www.halfen.com)**



The fixing components (fastening bolts, washers, etc.) are not included with the DEMU Fixing system. These components must be ordered separately for each project according to the static engineer's specifications.

# SOFTWARE


## Calculation Software

### Software for HALFEN DEMU fixing anchors

The Calculation program for HALFEN DEMU T-FIXX® and HALFEN DEMU Bolt anchors (types 1988, 1985, 1980-P) provides the user with a convenient and powerful calculation tool.

Basis for the calculation of HALFEN DEMU Fixing anchors is the European standard CEN/TS 1992-4-1/2 (from May 2009) which also covers the design method for headed fasteners.

This pre-norm prescribes a wider range of verifications, which are processed by user-friendly Software. The result for the relevant load situation requires minimal input by the user.

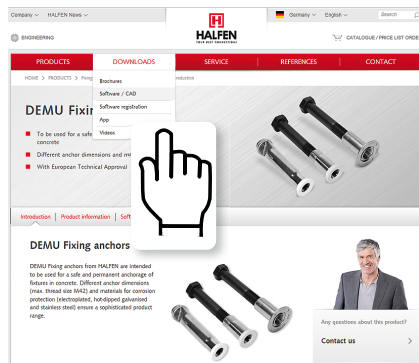

The software can be found under:  
[www.halfen.com](http://www.halfen.com) → downloads → software/  
CAD → Dimensioning software → Fixing  
systems

### Boundary conditions

The calculation takes into account all necessary boundary conditions, for example:

- concrete strength
- cracked or non-cracked concrete
- the concrete components geometry, in particular the distances of the fixing anchors to the component edge
- geometry / size of the fixing base plate
- quality of the fixing bolt
- various reinforcement patterns
- consideration of several dimensioning loads
- configuration of fasteners, e.g. single fastener or groups of fasteners (up to 8 fasteners)

### Input

The geometry and loads are entered interactively. Entries are shown in a graphical-display.

The anchor geometry can also be modified in the drawing, by editing the dimensions or by dragging with the mouse.

### Calculation


The calculation is according to the European standard CEN/TS 1992-4-1/2.

### Results


The software calculates and displays either the results for a preselected anchor or – in multiple design – a list of all suitable anchors. Results highlighted in red indicate excessive loads or incomplete verifications.



Screenshot 1: start screen

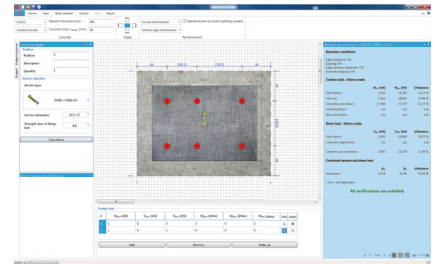

Screenshot 2: programme interface

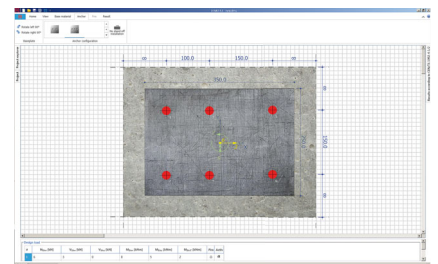

Screenshot 3: drawing



Screenshot 4: preview of the end result with calculation report

## SOFTWARE

### Calculation Software / Tender Text

#### Software for HALFEN DEMU fixing anchors

##### Visual control



All verifications for the selected anchor are listed in the results overview. Values highlighted in red indicate an excessive load, which means values higher than 100% in the utilisation ratio.

Detailed information on all calculation results are displayed in the detailed report.

##### Printouts



Printouts are possible in a brief and verifiable long version. The short version shows only an overview of boundary conditions and calculation results of the different failure mechanisms.

The long version includes all decisive verifications for a verifiable printout. Both versions can also be exported as a xps-file.

##### Software version



The latest version of the dimensioning program is available for download on the internet at [www.halfen.com](http://www.halfen.com)

Including the option to select English, German, French or Dutch as language.

##### System requirements:

- Windows 7, 8, 10  
with up-to-date Servicepacks
- installed .NET Framework 4.03
- 1 GB RAM / 1.800MHz
- Screen resolution: 1024 x 768px

#### Tender text

##### HALFEN DEMU Fixing anchor type T-FIXX M16×100 GV

HALFEN DEMU Fixing anchor T-FIXX® with standard metric ISO thread for permanent fixing of components,

with European Technical Assessment ETA-13/0222, suitable for anchoring in reinforced or non-reinforced standard concrete in strength class of at least C20/25 and maximum C90/105 in accordance with EN 206:2017-01, statics proven in accordance with CEN/TS 1992-4 section 1 and 2,

##### Type T-FIXX M16×100 GV

with

M16 = Standard metric ISO thread size M16 [mm],

100 = Total length of fixing anchor [mm] (plus identification clip length),

GV = Corrosion protection zinc galvanized,

or equivalent, deliver and install according to the manufacturer's instructions.



# SOFTWARE

## Calculation Example


### Example for design of T-FIXX® using the Calculation software

#### Given data

- corrosion resistance: zinc galvanized
- concrete: C30/37, cracked
- slab thickness:  $h = 200\text{ mm}$
- concrete cover:  $c_{nom} = 30\text{ mm}$
- design loads:  $N_{Ed,z} = 6.0\text{ kN}$   
 $V_{Ed,x} = 3.0\text{ kN}$   
 $M_{Ed,y} = 5.0\text{ kNm}$   
 $M_{Ed,T} = 2.0\text{ kNm}$

- group of four fasteners
- no influence of edges
- strength class of the fixing bolt is 8.8

#### Calculation for a selected T-FIXX M12 × 70 GV

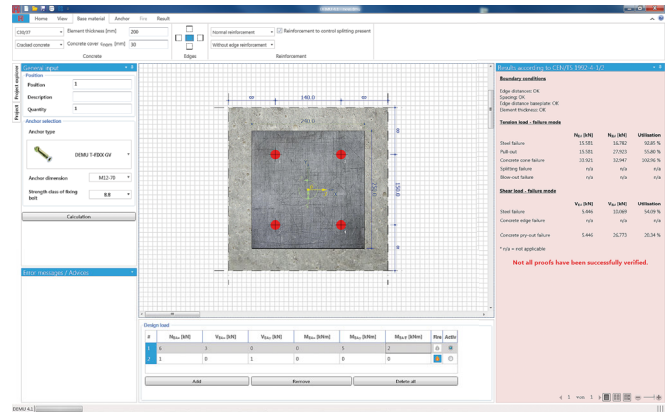

Results according to CEN/TS 1992-4-1/2

**Boundary conditions**  
 Edge distances: OK  
 Spacing: OK  
 Edge distance baseplate: OK  
 Element thickness: OK

**Tension load - failure mode**

	$N_{Ed}$ [kN]	$N_{Rk}$ [kN]	Utilisation
Steel failure	15.581	16.782	92.85 %
Pull-out	15.581	27.923	55.80 %
Concrete cone failure	33.921	32.947	102.96 %
Splitting failure	n/a	n/a	n/a
Blow-out failure	n/a	n/a	n/a

**Shear load - failure mode**


	$V_{Ed}$ [kN]	$V_{Rk}$ [kN]	Utilisation
Steel failure	5.446	10.069	54.09 %
Concrete edge failure	n/a	n/a	n/a
Concrete pry-out failure	5.446	26.773	20.34 %

\* n/a = not applicable

**Not all proofs have been successfully verified.**

#### Calculation is negative!

Loads are too high for 4 × T-FIXX M12 × 70 GV

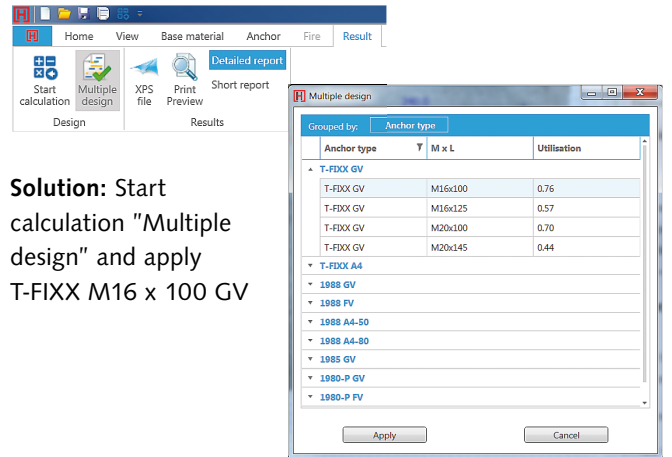

**Solution: Start calculation "Multiple design" and apply T-FIXX M16 x 100 GV**

Results according to CEN/TS 1992-4-1/2

**Boundary conditions**  
 Edge distances: OK  
 Spacing: OK  
 Edge distance baseplate: OK  
 Element thickness: OK

**Tension load - failure mode**

	$N_{Ed}$ [kN]	$N_{Rk}$ [kN]	Utilisation
Steel failure	15.932	27.241	58.48 %
Pull-out	15.932	45.683	34.88 %
Concrete cone failure	33.159	47.801	69.37 %
Splitting failure	n/a	n/a	n/a
Blow-out failure	n/a	n/a	n/a

**Shear load - failure mode**


	$V_{Ed}$ [kN]	$V_{Rk}$ [kN]	Utilisation
Steel failure	5.446	16.345	33.32 %
Concrete edge failure	n/a	n/a	n/a
Concrete pry-out failure	5.446	35.162	15.49 %

**Combined tension and shear load**

	$\beta_N$	$\beta_V$	Utilisation
Interaction	0.694	0.333	77.01 %

\* n/a = not applicable

**All verifications are satisfied.**

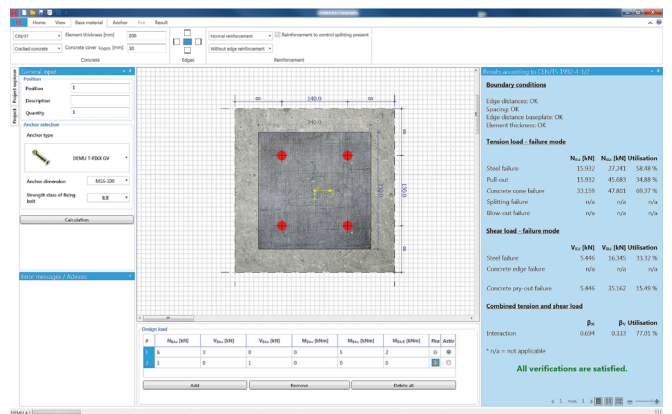

**Calculation is positive with 4 × T-FIXX M16 × 100 GV**





**Leviat**<sup>®</sup>  
A CRH COMPANY

**Innovative engineered products and construction solutions  
that allow the industry to build safer, stronger and faster.**

## Worldwide contacts for Leviat:

### Australia

**Leviat**  
98 Kurrajong Avenue,  
Mount Druitt Sydney, NSW 2770  
Tel: +61 - 2 8808 3100  
Email: info.au@leviat.com

### Austria

**Leviat**  
Leonard-Bernstein-Str. 10  
Saturn Tower, 1220 Wien  
Tel: +43 - 1 - 259 6770  
Email: info.at@leviat.com

### Belgium

**Leviat**  
Borkelstraat 131  
2900 Schoten  
Tel: +32 - 3 - 658 07 20  
Email: info.be@leviat.com

### China

**Leviat**  
Room 601 Tower D, Vantone Centre  
No. A6 Chao Yang Men Wai Street  
Chaoyang District  
Beijing · P.R. China 100020  
Tel: +86 - 10 5907 3200  
Email: info.cn@leviat.com

### Czech Republic

**Leviat**  
Business Center Šafránková  
Šafránková 1238/1  
155 00 Praha 5  
Tel: +420 - 311 - 690 060  
Email: info.cz@leviat.com

### Finland

**Leviat**  
Vädursgatan 5  
412 50 Göteborg/ Sweden  
Tel: +358 (0)10 6338781  
Email: info.fi@leviat.com

### France

**Leviat**  
18, rue Goubet  
75019 Paris  
Tel: +33 - 1 - 44 52 31 00  
Email: info.fr@leviat.com

### Germany

**Leviat**  
Liebigstrasse 14  
40764 Langenfeld  
Tel: +49 - 2173 - 970 - 0  
Email: info.de@leviat.com

### India

**Leviat**  
309, 3rd Floor, Orion Business Park  
Ghodbunder Road, Kapurbawdi,  
Thane West, Thane,  
Maharashtra 400607  
Tel: +91 - 22 2589 2032  
Email: info.in@leviat.com

### Italy

**Leviat**  
Via F.lli Bronzetti 28  
24124 Bergamo  
Tel: +39 - 035 - 0760711  
Email: info.it@leviat.com

### Malaysia

**Leviat**  
28 Jalan Anggerik Mokara 31/59  
Kota Kemuning, 40460 Shah Alam  
Selangor  
Tel: +603 - 5122 4182  
Email: info.my@leviat.com

### Netherlands

**Leviat**  
Oostermaat 3  
7623 CS Borne  
Tel: +31 - 74 - 267 14 49  
Email: info.nl@leviat.com

### New Zealand

**Leviat**  
2/19 Nuttall Drive, Hillsborough,  
Christchurch 8022  
Tel: +64 - 3 376 5205  
Email: info.nz@leviat.com

### Norway

**Leviat**  
Vestre Svanholmen 5  
4313 Sandnes  
Tel: +47 - 51 82 34 00  
Email: info.no@leviat.com

### Philippines

**Leviat**  
2933 Regus, Joy Nostalg,  
ADB Avenue  
Ortigas Center  
Pasig City  
Tel: +63 - 2 7957 6381  
Email: info.ph@leviat.com

### Poland

**Leviat**  
Ul. Obornicka 287  
60-691 Poznań  
Tel: +48 - 61 - 622 14 14  
Email: info.pl@leviat.com

### Singapore

**Leviat**  
14 Benoi Crescent  
Singapore 629977  
Tel: +65 - 6266 6802  
Email: info.sg@leviat.com

### Spain

**Leviat**  
Poligono Industrial Santa Ana  
c/ Ignacio Zuloaga, 20  
28522 Rivas-Vaciamadrid  
Tel: +34 - 91 632 18 40  
Email: info.es@leviat.com

### Sweden

**Leviat**  
Vädursgatan 5  
412 50 Göteborg  
Tel: +46 - 31 - 98 58 00  
Email: info.se@leviat.com

### Switzerland

**Leviat**  
Hertistrasse 25  
8304 Wallisellen  
Tel: +41 - 44 - 849 78 78  
Email: info.ch@leviat.com

### United Kingdom

**Leviat**  
A1/A2 Portland Close  
Houghton Regis LU5 5AW  
Tel: +44 - 1582 - 470 300  
Email: info.uk@leviat.com

### United States of America

**Leviat**  
6467 S Falkenburg Rd.  
Riverview, FL 33578  
Tel: (800) 423-9140  
Email: info.us@leviat.us

### For countries not listed

Email: info@leviat.com

## Leviat.com

For information on certified management systems and standards see [www.ancon.co.uk](http://www.ancon.co.uk) | [www.aschwanden.com](http://www.aschwanden.com) | [www.halfen.com](http://www.halfen.com)

### Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

